

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : A61M 5/145	A1	(11) International Publication Number: WO 92/21391 (43) International Publication Date: 10 December 1992 (10.12.92)
<p>(21) International Application Number: PCT/US92/00385</p> <p>(22) International Filing Date: 16 January 1992 (16.01.92)</p> <p>(30) Priority data: 712,110 7 June 1991 (07.06.91) US</p> <p>(71) Applicant: LIEBEL-FLARSHEIM COMPANY [US/US]; 2111 E. Galbraith Road, Cincinnati, OH 45237 (US).</p> <p>(72) Inventors: NEER, Charles ; 949 Tarragon Lane, Milford, OH 45150 (US). FAGO, Frank, M. ; 8581 High Trail Court, Mason, OH 45040 (US). DIETERLEN, Paul, E. ; Route 5 Colman Road, Covington, KY 41015 (US). GO-ETHEL, James, H. ; 9966 Thornwood Court, Cincinnati, OH 45241 (US).</p>		<p>(74) Agents: JORDAN, Joseph, R. et al.; Wood, Herron & Evans, 2700 Carew Tower, Cincinnati, OH 45202 (US).</p> <p>(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CI (OAPI patent), CM (OAPI patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC (European patent), MG, ML (OAPI patent), MN, MR (OAPI patent), MW, NL, NL (European patent), NO, PL, RO, RU, SD, SE, SE (European patent), SN (OAPI patent), TD (OAPI patent), TG (OAPI patent).</p> <p>Published <i>With international search report.</i></p>

(54) Title: FRONT LOADING SYRINGE DRIVER

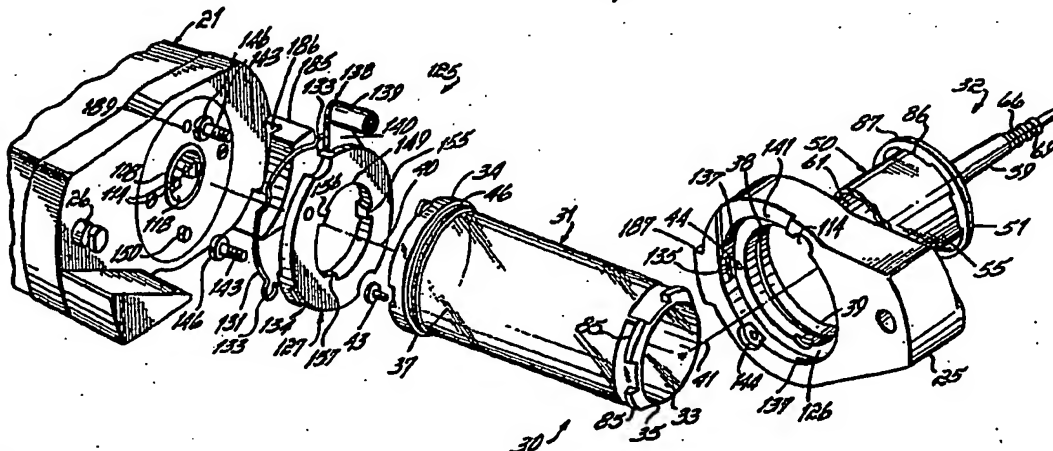

(57) Abstract

An animal fluid injector, replaceable syringe and method of replacement of the syringe in the injector are provided in which the syringe (32) is loadable and unloadable into and from the injector through the open front end (35) of a pressure jacket (31) of the injector, thereby permitting replacement without retraction of the syringe plunger drive (100) or disconnection of the injection tubing (65). The syringe (32) is provided with a pressure restraining front end, such as an integral or removable cap (56) with structure such as threads (86) that lock the syringe (32) to the front end of the jacket (31) by mating with threads (85) on the jacket (31). A mechanism (125) in the injector, which includes, for example, a key on cam ring (127) operated by a lever (140) with one hand of an operator, interacts with structure such as asymmetrically spaced notches (151-153) on the back end of the syringe (32) to, for example, rotate the syringe and simultaneously translate or rotate a coupling (96) on the syringe plunger (54) into and out of engagement with the plunger drive (100) in the injector.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroun	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

- 1 -

Front loading syringe driver.

The present invention relates to
5 injectors and more particularly to disposable
replacement syringes for animal fluid injectors.

Background of the Invention:

Injectors are devices that expel fluid,
such as contrasting media, from a syringe and
10 through a tube into an animal. The injectors are
provided with an injector unit, usually adjustably
fixed to a stand or support, having a drive that
couples to the plunger of the syringe to drive it
forward to expel fluid into the tube, or that may
15 be driven rearward to draw fluid into the syringe
to fill it. Usually the syringe is a disposable
replacement type.

In the injection phase where the plunger
is driven forward, pressures are developed in the
20 syringe that range from, for example, twenty-five
psi for some applications to over 1000 to 1200 psi
for other applications. Syringes that will contain
fluid under such pressures are expensive and

- 2 -

therefore impractical where the syringes are to be disposable. Accordingly, many such injectors, such as angiographic injectors, for example, have been provided with pressure jackets fixed to the injector units and into which the syringes are inserted. The pressure jackets contact the outer surfaces of the syringe to restrain the walls of the syringe against the internal pressures.

To hold the syringes in the pressure jackets, the jackets of the prior art have been configured to surround the front ends of the syringes to restrain the syringe front wall against forward acting forces of the drive and the fluid pressure and to hold the syringe in the jacket. Because the front end of the pressure jacket is closed, rear loading was necessary, and accessibility thereto was provided by hinging or rotating the jacket to allow for removal and replacement of the syringe from the rear. The opening and reclosing of the injector unit to replace the syringe requires a certain amount of time, which, in the course of the procedure being performed, is not wholly desirable.

Furthermore, while for many years injector units of various types have been capable of disconnection of the plunger drive from the drive coupling on the syringe plunger at any

- 3 -

position of the plunger within the syringe,
retraction of the drive is typically required
before the syringe can be removed. This is because
the opening of the injector unit to remove and
5 insert the syringe from the rear requires, for
example, a translating or rotating of the jacket
from the axis of the drive, which cannot be
achieved if the plunger drive is extended.

For example, at the end of an injection
10 procedure, the syringe plunger typically is
forward, as is the plunger drive. Since, in the
prior art injectors that load from the rear, the
pressure jacket is moved through the position that
the drive occupies when extended in order to remove
15 the syringe. Hence, the syringe cannot be
immediately removed without retracting the plunger
drive. Further, the disposable tubing that
connects to the nozzle of the syringe must be
disconnected from the syringe in order to remove
20 the syringe from the jacket. Additionally, when an
empty new syringe is inserted, the drive must be in
its retracted position.

More often than not, the syringe is
inserted empty and filled by retraction of the
25 plunger with an injection tube connected to a
supply of the fluid that is to be injected. In
addition, before an empty new syringe can be

- 4 -

filled, it is necessary that the plunger be fully forward in the syringe so that the syringe can be filled by rearward retraction of the plunger. As a consequence of the need with such prior art injectors to retract the drive upon loading the syringe, it is then necessary to fully advance the drive to the position in which it is in engagement with the plunger and the plunger is in its full forward position. The drive then engages a coupling on the plunger of the replacement syringe. This need to retract and advance the drive contributes to a loss of time in the syringe replacement process.

Accordingly, there has been a need to more quickly load and unload disposable replacement syringes in angiographic injectors, and for injectors and replacement syringes that can accommodate a more efficient process of syringe replacement.

Summary of the Invention:

It is an objective of the present invention to provide a method and apparatus by which replaceable syringes can be more efficiently loaded into and unloaded from injectors.

It is a more particular objective of the present invention to provide an injector, more particularly an angiographic injector, a

- 5 -

replacement syringe therefor, and a method of replacing the syringe in the injector that provide for more efficient replacement of the syringes in the injector. It is an additional objective of the present invention to provide an injector wherein a used syringe can be removed and a new one inserted in the injector without retraction of the drive from the pressure jacket, in most applications. It is a further objective of the invention to allow for the removal of the used syringe from the jacket without disconnection of the injector tube from the syringe nozzle.

It is still a further objective of the present invention to provide an injector, replaceable syringe and method of syringe replacement with which the replacement of the syringe can be achieved with simple motions by the operator or with rapid operation of injector unit mechanisms.

An additional objective of the present invention is to provide an injector and replaceable syringe therefor that will facilitate control of the orientation of the syringe in the jacket, and thereby provide for positive, rapid and reliable engagement of the syringe with locking structure that holds the syringe in the jacket, engagement of the plunger drive and plunger drive coupling, or

- 6 -

connection of the injection tube to the outlet of the syringe.

5 A further objective of the present invention is to provide for easy to operate mechanism and reliable locking structure for locking the syringe in place in the pressure jacket of the injection unit.

10 Another objective of the present invention is to provide an injector and syringe arrangement that minimizes or eliminates the probability of spillage from the syringe nozzle flowing into the injector equipment, and otherwise enhancing the ability to maintain sterility and cleanliness 10 of the equipment.

15 According to the principles of the present invention, there is provided an angiographic injector having a front end loadable syringe that can be loaded into and removed from the injector pressure jacket through an opening
20 that is provided in the front end of the pressure jacket. To provide this front end loadable feature, the syringes of the preferred and illustrated embodiments of the present invention are provided with a front wall that is pressure
25 restraining, that is, is of sufficient strength to support the front of the syringe against the expected pressures within the syringe, and that is

- 7 -

securable to the front end of the pressure jacket so as to complete the pressure restraining enclosure of the syringe within the pressure jacket and hold the syringe in the jacket. In one
5 preferred form, this front end of the injector is formed of a separate pressure restraining cap made of material that is separate from the front wall of the syringe and may be reusable. In another
10 preferred form, the cap may be formed integrally of the front syringe wall. With the cooperating structure of the jacket and the syringe, restraining of the pressure jacket along the front and sides of the syringe is provided where the jacket allows for the replacement of the syringe
15 from the front.

In one preferred and illustrated embodiment of the invention, the front end of the syringe locks to the front end of the pressure jacket through a cooperating engagement of mating
20 threads on the syringe jacket. The threads include external thread sections formed at the front end of the pressure jacket and internal threads formed on an outwardly extending flange or rim of the front wall of the syringe, preferable on a pressure
25 restraining cap. Alternatively, other securing or locking structure such as a clip or an adaptor, for

- 8 -

example, may be employed to join the syringe to the jacket.

In the preferred embodiment of the present invention, the threads are engageable in a limited number of angular positions to thereby predetermine the angular orientation of the syringe in the pressure jacket. Additionally, other keys and keyways carried respectively by the unit and by the syringe limit the angular position in which the syringe may be inserted into the jacket to a unique predetermined angular orientation. Preferably, three keyways, such as slots or notches, unequally spaced around the back, rearward or proximate edge of the syringe body, engage similarly spaced keys or tabs on the unit at the rear end of the pressure jacket to permit insertion of the syringe into the jacket in one and only one orientation.

Further in accordance with principles of the present invention, in its preferred embodiment, a coupling on the syringe plunger is centrally located and symmetrical about the axis of the plunger. A pair of jaws on the plunger drive is moveable either by transverse straight or arcuate translatory motion or by forward longitudinal motion to form a connection between the coupling and the drive. Once coupled to the drive, the coupling remains engaged to the drive during

- 9 -

longitudinal motion of the drive to cause the plunger to move forward or backward with the drive.

Disengagement occurs thereafter only upon transverse translational motion of the plunger with respect to the drive. In certain embodiments, this translatory transverse motion occurs by translatory movement of the jacket, and the injector unit door that carries the jacket, with respect to the plunger drive and the unit housing. In other embodiments, an asymmetrical coupling is provided that engages and disengages the plunger drive upon rotational movement of the syringe with respect to the drive.

Preferably, the motion for locking the syringe to, and unlocking the syringe from, the jacket is achieved by rotation of the syringe in the jacket, and preferably, this motion is linked to, and occurs simultaneous with, the motion that engages and disengages the plunger coupling and drive, whether that coupling is by translation or rotation. In addition, the syringe and plunger drive are so dimensioned and positioned to prevent contact between the drive and the sterile interior wall of the syringe, regardless of the position of the drive, as the syringe is being loaded.

Preferably, the syringe is formed of a cylindrical body, with the front end in the shape

- 10 -

of a truncated cone that terminates in a forwardly extending neck with an orifice at its remote end that is connectable with an injection tube. The front end of the syringe is shaped so as to direct fluid leaking from the nozzle outwardly around the front end of the jacket. This prevents leakage, which often results upon disconnection of the injection tubing, from entering the space between the pressure jacket and the syringe body.

Replacement of the syringe begins, in the preferred embodiments of the invention, with the unlocking the syringe at its front end from the front end of the pressure jacket, preferably by rotating the syringe with respect to the jacket, and by disengaging the plunger drive from the syringe plunger, alternatively by transverse translational or rotational motion, preferably simultaneous with and linked to the motion that disengages the syringe from the jacket. The unlocking of the syringe from the jacket occurs, for example, by loosening mating threads at the front of the syringe and jacket. The twisting of the syringe in the jacket is linked to motion that either translates transversely or rotates a coupling on the syringe plunger out of engagement with the plunger drive.

- 11 -

Then the syringe is removed from the jacket through the open front end of the jacket. This removal may take place without retraction of the plunger drive, should the drive be advanced in the pressure jacket at the time of disengagement from the plunger coupling. The used syringe may also be removed without disconnection of the disposable injection tubing from the nozzle of the syringe.

When the used syringe is removed, a replacement syringe is inserted into the jacket through its open forward end and the front end of the new syringe is locked to the front end of the jacket, preferably by relative rotation of the syringe in the jacket to cause, for example, engagement between mating threads on the front end of the syringe and the front end of the jacket. The plunger drive, in one embodiment, is translated to bring the plunger coupling engaging jaws into alignment with the plunger coupling, preferably simultaneously with the locking of the syringe to the jacket. The jaws thereby either engage the coupling upon the translatory motion, or thereafter engage the coupling by longitudinal advancement of the drive against the coupling. In one embodiment, the jaws are positioned off center of the drive so that the drive, whether in the engaging or the

- 12 -

disengaging positions, does not contact a syringe as the syringe is guided by the jacket during loading.

5 In an alternative embodiment, engagement of the plunger drive with the coupling occurs by relative rotation of the drive and the coupling, preferably by rotating the coupling relative to a stationary plunger drive, rather than by translational motion between the drive and the
10 coupling. Only if the rest position of the plunger of the replacement syringe is behind the final position of the plunger drive at the time it was disconnected from the coupling of the plunger of the syringe being replaced need the plunger drive
15 be retracted.

The engagement and disengagement motions between the plunger drive and plunger drive coupling, and between the syringe and the pressure jacket, are provided with manually operable
20 mechanism that, in the preferred and illustrated embodiments, rotates the syringe in the jacket and further either rotates or translates the coupling with respect to the plunger drive, with a simple one hand operated mechanism. The mechanism
25 provides a convenient lever, operable through a short arc, to rotate the syringe in the jacket and to then, preferably, translate the pressure jacket

- 13 -

that carries the syringe and is carried by the injector unit door, or to otherwise move the syringe with respect to the drive, to bring the plunger coupling of the syringe into or out of alignment with the plunger drive.

The present invention provides a disposable syringe that may be replaced in an angiographic or CT injector with great efficiency and speed. Further, replacement may occur without retraction of the plunger drive of the injector unit. Simple and rapid one hand operation of the engaging and disengaging structure is provided.

These and other objectives of the present invention will be more readily apparent from the following detailed description of the drawings in which:

Brief Description of the Drawings

Fig. 1 is a perspective view of an angiographic CT injector embodying principles of the present invention.

Fig. 1A is a perspective view of another form of angiographic injector embodying principles of the present invention.

Fig. 2 is an exploded perspective view of a portion of one preferred embodiment of the injector of Fig. 1.

- 14 -

Fig. 3 is a perspective view of the portion of the injector of Fig. 2.

Fig. 4 is a cross-sectional view along lines 4-4 of Fig. 3 illustrating a replaceable
5 syringe unlocked from the housing for insertion into or removal therefrom.

Fig. 5 is a cross-sectional view similar to Fig. 4 but illustrating the syringe locked to the structure carried by the housing.

10 Fig. 6 is a cross-sectional view along the line 6-6 of Fig. 5.

Fig. 7 is an elevational diagrammatic illustration of the injector of Fig. 1 with the pressure jacket and syringe removed, and showing
15 the syringe locking structure in the locked position such as in Figs. 5 and 6.

Fig. 8 is an elevational diagrammatic view similar to Fig. 7 illustrating the syringe locking structure in the unlocked position such as
20 in Figs. 2-4.

Fig. 9 is an elevational diagrammatic view similar to Fig. 7 illustrating the locking mechanism in the housing door release position.

Fig. 10 is a cross-sectional view
25 through the housing of the injector taken along lines 10-10 of Fig. 1 with the plunger drive disengaged from the syringe plunger coupling.

- 15 -

Fig. 11 is a view of a portion of Fig. 10 illustrating the plunger drive longitudinally moving into engagement with the plunger coupling.

5 Fig. 12 is a view of a portion of Fig. 10 illustrating the plunger drive in engagement with the plunger coupling.

Fig. 13 is a front view of a portion of another embodiment of the injector of Fig. 1.

10 Fig. 14 is a view of an alternative embodiment of a portion of a syringe according to principles of the present invention.

15 Fig. 15 is a cross-sectional view similar to Fig. 5 of an alternative embodiment of the invention, illustrating alternative engaging structure between the front ends of the syringe and jacket.

20 Fig. 16 is a cross-sectional view similar to Fig. 5 of a further alternative embodiment of the invention, also illustrating alternative engaging structure between the front ends of the syringe and jacket.

25 Fig. 17 is a front end view of still a further alternative embodiment of the invention, also illustrating alternative engaging structure between the front ends of the syringe and jacket.

Detailed Description of the Drawings

- 16 -

Referring to Fig. 1, an angiographic injector 10 according to another preferred embodiment of the present invention is illustrated, configured for CT applications. The injector 10 includes a ceiling mounted support 11, adjacent a CT X-ray unit, to the lower surface of which is rigidly supported a vertically descending support column 12.

Remote from the support 11 is an injector control module console 13 behind a wall which isolates the operator area from the X-ray equipment. The console 13 is located adjacent a control 14 of the X-ray equipment. Electrical power and control cables (not shown) communicate power and control signals through the support 11 and the column 12 and to a power lead 15. The console 13 connects with an injector control module 16, which includes a programmable microprocessor (not shown) to which commands and programming codes are input through a keyboard 17 on the console 13. The console 13 is also provided with an operator display 18 to aid in interfacing the input commands and injector status with the operator.

Attached to the column 12 is an articulating adjustable arm 19. To the remote end of the arm 19 is adjustably supported injection

- 17 -

module unit 20. The arm 19 is capable of setting the unit 20 at varying positions adjacent a patient bed of the CT unit.

Referring to Fig. 1A, an angiographic injector 10a according to another preferred embodiment of the present invention is illustrated. The injector 10a includes a wheeled base 11a to the top of which is rigidly supported a vertically adjustable upstanding support column 12a. To the top of the column 12a is supported a control module platform 13a. Electrical power is communicated from a power cord (not shown) through the base 11 and the upstanding support 12a and through a power lead 15a to a control module 16a rigidly supported to the platform 13a. The control module 16a includes a programmable microprocessor (not shown) to which commands and programming codes are input through a keyboard 17a on the module 16a. The module 16a is also provided with an operator display 18a to aid in interfacing the input commands and injector status with the operator. Attached to the platform 13a is an articulating adjustable arm 19a. To the remote end of the arm 19a is adjustably supported the injection module unit 20.

The injection module unit 20 of the embodiments of Figs. 1 and 1A includes a

- 18 -

housing 21 which contains the operating drive structure of the injector 10 or 10a. The housing 21 has a support bracket 23 fixed thereto and adjustably pivotally supported to the remote end 24 of the articulating arm 19 or 19a. The housing 21 has pivotally attached to the front thereof a door 25 at the front thereof which is pivotally connected to the housing 21 at a longitudinally extending pivot or hinge pin 26 (Fig. 2) rigidly supported on the housing 21 and extending forwardly from the front of the housing 21.

On the top of the housing 21 is an injector position and local control panel 27 having a position indicator scale 28 thereon, which displays the position of the injector drive to the operator. The panel 27 also includes a pair of forward and reverse drive direction control buttons 29, which are selectively actuatable to activate a drive within the housing 21 in either the forward or reverse directions.

Extending forwardly from the front of the door 25 is an injector syringe and pressure jacket assembly 30, the structure of which can be better understood with reference to Figs. 2-5 below. The syringe and jacket assembly 30 includes a hard plastic pressure jacket 31, which may be of opaque

- 19 -

or transparent material, a removable and replaceable disposable syringe 32, which may be of opaque, transparent or semi-transparent material, and related structure hereinafter described.

5 The syringe 32 is disposable, and includes walls which will withstand only moderate or low pressure. The walls are usually outwardly deformable under operating pressures, particularly pressures of 300 psi or more. Such higher
10 pressures are necessary to overcome pressure drops through the injection tubing at higher flow rates, which are often desirable. The jacket 31 is made of a stronger transparent material that will withstand the operating pressures. When the
15 syringe 32 is contained in the jacket 31, it is surrounded by the jacket 31 and supported by the jacket 31 against expansion caused by the fluid pressure within as the syringe 32 expands against the jacket wall.

20 The pressure jacket 31 has a generally cylindrical inner bore 33 extending therethrough from a proximate end 34 adjacent the door 25 to a remote end 35 of the pressure jacket 31 toward the front of the unit 20. The bore 33 is dimensioned
25 so as to receive through the remote end 35 the disposable syringe 32 and to support the syringe against expansion from fluid pressure within such

- 20 -

fluid pressure may range to more than a thousand
psi. The pressure jacket 31 has an annular
flange 37 extending outwardly around the proximate
end 34. The flange 37 is integrally formed with
5 the jacket cylinder and is shaped to conform to an
annular recess 38 surrounding a circular hole 39 in
the door 25 to which the jacket 31 may be assembled
by insertion from the rear. The hole or opening 39
in the door 25 and the cylindrical bore 33 of the
10 jacket 31 are concentric with a longitudinal
axis 40 on which also lies an axis 41 of the
syringe 32 when the syringe 32 is positioned in the
bore 33 of the jacket 31. The jacket 31 is firmly
and rigidly attached to the door 25 with a pair of
15 screws 43, only one of which is shown, which are
threaded into a pair of holes 44 in the back of the
door 25 (Fig. 2). An O-ring seal 46 surrounds the
flange 37 of the jacket 31 in the recess 38 of the
door 25.

20 The syringe 32 includes a syringe case 50
formed of a single piece of molded plastic
material, a pressure cap 51, a tubing collar 52
(Fig. 3) and a plunger 54 (Figs. 3-5). The
syringe case 50 includes a cylindrical syringe body
25 55 having an open proximate end 56 and a remote end
58 to which is integrally formed a conical front
wall 57. The front wall 57 is truncated at its

- 21 -

forward end, to which is integrally formed an elongated neck 59 extending from the wall 57 at the center thereof. The neck 59 of the syringe case 50 has an orifice 60 (Fig. 3) in its remote end which communicates with an internal syringe cavity 61 formed within the neck 59, the conical front wall 57 and the cylindrical body 55 of the case 50 of the syringe 32. The rear end of the cavity 61 is further defined by a forward facing conical surface 64 of the plunger 54. The conical surface 64 is of a slope which conforms to the slope of the interior of the conical front wall 57. The plunger 54 is slidable within the body 55 of the syringe case 50 such that the cavity 61 is of variable volume.

Near the front end of the neck 59 of the syringe case 50, just behind the orifice 60, is an external thread 66 configured to mate with threads 67 on the interior of collar 52 (Fig. 3). The thread 66 in the neck 59 has an stop 69 at near forward end thereof to engage an abrupt step 70 on the thread 67 of the collar 52 so that, when the syringe 32 is properly oriented in the jacket 31, the collar 52, when loosened to its maximum extent, will assume a predetermined orientation so as to present, in an upwardly facing orientation, a tube end receiving slot 62 formed in the remote end of

- 22 -

the collar 52. This slot 62 is of T-shaped cross-section so as to receive the enlarged flange end 63 of a tube 65, through which fluid from the syringe cavity 61 is injected into a patient.

5 The cap 51 is generally conical in shape and has an inner rearward surface 75, which conforms to the front surface of the conical wall 57 of the case 50 of the syringe 32. In certain embodiments, the rearward conical surface 75 of the

10 cap 51 may be bonded to the front surface of the conical wall 57 of the case 50 of the syringe 32, or it may be formed integrally therewith, molded from the same plastic material as the case 50 of the syringe 32. In the preferred and illustrated

15 embodiment, the cap 51 is separate from the syringe body portion 55 and has a pair of holes or detents 76 into which fit a pair of projections 77 extending forwardly from and formed integrally on the outer surface of the conical wall 57 of the

20 case 50 of the syringe 32. The cooperation of the pins or projections 77 with the holes or detents 76 prevent the cap from rotating with respect to the syringe case 50 when the cap 51 is mounted on the syringe 32.

25 To hold the cap 51 against the conical wall 57 of the case 50 of the syringe 32, six resilient tabs 78 are formed about a central inner

- 23 -

hole 79 of the cap 51. The tabs 78 are separated by six equally spaced radial slots 80 (Fig. 3). The hole 79 in the cap 51 is equal to or only slightly greater in size than the circular forward end of the conical wall 57 of the case 50 of the syringe 32. The neck 59 of the syringe 32 has an enlarged straight section 81 slightly greater in diameter than the hole 79 in the cap 51 and also greater in diameter than the forward end of the conical wall 57 of the case 50, thereby forming a groove 82 at the juncture of the straight neck portion 81 with the conical wall 57 so that the tips of the tabs 78, which are sufficiently resilient to slide over the enlarged neck portion 81 as the cap 51 is inserted on the case 50 of the syringe 32 with the hole 79 surrounding the neck 59 to snap fit into the groove 82.

The syringe 32 includes structure that is configured to lock the syringe 32 to the front end of the jacket 31 by cooperating with mating structure on the jacket 31. The jacket 31 has, spaced around the circumference thereof near the remote or front end 35 of the jacket 31, four equally spaced outwardly projecting thread sections 85. These thread sections 85 are slightly less than 45° in extension around the circumference of the jacket 31 and are spaced apart with gaps of

- 24 -

slightly greater than 45°. The cap 51 has a cylindrical rim 87 in which are formed four similarly sized and spaced mating thread sections 86. The thread sections 86 project inwardly toward the jacket 31 when the syringe 32 is positioned in the jacket 31. As such, when the syringe 32, with the cap 51 assembled to it is inserted into the jacket 31, the threads 86 of the cap 51 pass through the spaces between the threads 85 on the jacket 31 to a point behind the threads 85. When so inserted, the syringe assembly 32 with the cap 51 may be twisted clockwise 45° to tighten and thereby secure the cap 51 to the jacket 31 by engagement between the threads 85 and 86 as shown in Fig. 5, to thereby lock the syringe in the bore 33.

The piston 54 of the syringe 32 is molded of an elastomeric material. Preferably, the piston 54 includes two portions molded of different materials and bonded together. These portions include a forward more flexible portion 90 in which is formed the forward conical surface 34. This forward portion 90 has a pair of outwardly extending rings 91 formed in the periphery thereof to make sealing engagement with the inside of the wall of the cylindrical body 55 of the syringe case 50. The rearward portion of the piston 54 is

- 25 -

a flat circular surface to which is bonded the flat circular forward surface of a more rigid rear portion 93 of the piston 54. The rear rigid portion 93 of the piston 54 is molded of a harder stronger plastic material and has a rearward facing circular surface 95 having a rearward extending coupling 96 integrally formed thereon at its center. The coupling 96 includes a rearwardly extending cylindrical shaft 97 on the axis 41 of the syringe 32 and a larger symmetrical cylindrical button 98 integrally formed at the rear end of the cylindrical shaft 97.

Referring to Fig. 10, a piston drive assembly 100 is illustrated contained within the housing 21. The drive assembly 100 includes an electric motor 101 mounted within the fixed housing 21 and having a rotary output shaft 102 with a drive gear 103 fixed to the remote end thereof. The drive gear 103 is positioned for driving engagement with a driven gear 104 fixed near the rear end of a drive screw or shaft 105 supported at its rear end in a bearing 106 fixed in the housing 21. The screw or shaft 105 has a continuous external helical thread 107 thereon which mates with interior threads of a carriage 108. The carriage 108 is slidably supported in a bushing 109 fixed in the housing 21. The shaft 105 rotates

- 26 -

within the housing 21 about a longitudinal axis 112.

At the forward end of the carriage 108 is supported a pair of hooked jaws 114 which are pivotally mounted at their rearward ends by a pair of pivot pins 115 to the carriage 108. The jaws 114 are biased toward the axis 112 by a pair of balls 116a and 116b of resilient material positioned between the outside of the jaws 114 and an inner cylindrical wall 117 of a recess 118 formed in the forward end of the carriage 108. The balls 116a, 116b are partially captured in depressions in the outer surfaces of the jaws 114. The balls 116a, 116b bias the jaws toward their innermost position toward the axis 112. The innermost position of the jaws is determined by a spacing block 119 on the axis 112 of the carriage 108 at the center of the cavity 118.

When a syringe 32 is locked in the jacket 31 with its axis 41 and the axis 40 of the jacket 31 may be in alignment with the axis 112 of the shaft 105, the plunger 54 may be located in the cylindrical body 55 of the syringe case 50 in a position forward of the remote end 56. Preferably, however, the jaws 114 are displaced to the side of axis 112 of the shaft 105 so that as the jaws 114

- 27 -

and coupling tip 98 are in their disengagement position, maximum clearance is provided so that the syringe 32 may be inserted into the jacket 31 without the sterile internal walls of the syringe 31 touching the components of the drive, as illustrated in the figures.

In the engaging position, the jaws 114 are nonetheless in alignment with the coupling 98 on the axes 40 and 41 of the jacket 32 and syringe 32. In such a situation, the jaws 114 may be in a retracted position at the center of the opening 39 of the door 25 adjacent to the proximate end 34 of the jacket 31, and out of engagement with the coupling 96 on the plunger 54. From this position, operation of the motor 101 rotates the shaft 105 and drives the carriage 108 forwardly to move the jaws 114 toward and into engagement with the coupling 96 on the plunger 54. This engagement takes place as shown in Fig. 11 where a pair of tapered cam surfaces 120 at the forward interface of the tips of the jaws 114 engage the enlarged portion or button 98 of the coupling 96 to expand the jaws, as shown in Fig. 11, to snap around the button 98 of the coupling 96 to form a driving engagement between the drive assembly 100 and the coupling 96 of the plunger 54 as shown in Fig. 12. Once so engaged, any forward or reverse movement of

- 28 -

the carriage 108 under the power of the motor 101 will cause the plunger 54 to be driven either forwardly or backwardly in the syringe body 55.

Disengagement of the jaws 114 from the coupling 96 can thereafter be achieved by translational movement between the coupling 96 and the jaws 114 between a disengaged position as shown in Fig. 4 and an engaged position as shown in Fig. 5. When the plunger coupling 96 and the jaws 114 are disengaged, the syringe 32 can be replaced without the need to retract the carriage 108 of the drive 100. This allows for rapid replacement of the syringe 32. Preferably, the jaws 114 are either fully retracted toward the housing 21 where engagement by translation of the coupling 96 will occur, or the jaws 114 are sufficiently within the jacket prior to replacement of the syringe so that the coupling 96 of the replacement syringe 32 will not contact the jaws 114 except as the drive 100 is advanced.

If sterility is not a problem, the most time saving approach would be to insert the syringe 32 into the jacket 31 with its plunger all the way forward and the drive fully advanced so that, when the syringe is translated toward the jaws 114, engagement will immediately occur and the plunger can be immediately retracted to fill the syringe.

- 29 -

When a syringe 32 is inserted into the jacket 31 when the plunger 54 is at its rearmost position toward the proximate end 56 of the syringe body 55, the coupling 96 is in a position adjacent the proximate end 56 of the syringe body 55 and projecting rearwardly therebeyond. When in such a position, engagement between the jaws 114 and the coupling 96 is brought about by translational movement between the position shown in Fig. 4 and that shown in Fig. 5. In the unlocked or disengaged position shown in Fig. 4, the axes 40 and 41 of the jacket 31 and the syringe 32, respectively, as well as the center of the opening 39 of the door 25, lie spaced from and parallel to the axis 112 of the shaft 105 as shown in Fig. 4. In the locked or engaged position, the axis 112 of the shaft 105 is slightly eccentric relative to the axes 40 and 41 of the jacket 31 and syringe 32, respectively, as shown in Fig. 5. This translational movement, the engagement and disengagement between the coupling 96 and the jaws 114 and the 45° rotational movement which secures the cap 51 to the pressure jacket 31 by engagement of the threads 85 and 86 are brought about by operation of a translating and locking mechanism 125, which is best understood by reference to Figs. 2-9.

- 30 -

The translating and locking mechanism 125 includes a cam and locking ring 127 which is rotatably retained in a circular recess 126 in the back of the door 25. The ring 127 has a generally semi-circular groove 130 in the back surface thereof for receiving a spring wire retaining clip 131 having a pair of looped ends 133 which extend through a pair of slots 134 in the rim of the ring 127 and into a selected one of three pair of diametrically opposed notches 135, 136 and 137 in the inner wall of the rim of the recess 126 in the door 25. The three pair of notches 135, 136 and 137 represent three positions of the translating and locking mechanism 125 which are the locked, unlocked and release positions, respectively. The locked position of the mechanism 125 in which the loops 133 of the ring 131 are in the notches 135, is that illustrated in Figs. 5-7 and 10. The unlocked position, in which the loops 133 of the ring 131 are in the notches 136, is that illustrated in Figs. 2-4 and 8. The release position, in which the loops 135 of the clip 133 are in notches 137, is that illustrated in Fig. 9. The ring 127 is moved among these three positions by a manually accessible handle 138 in the form of a cylindrical knob 139 rotatably attached to a lever arm 140

- 31 -

formed integrally and extending radially from the ring 127 through a slot 141 in the door 25 (Fig. 1). The ring 127 is retained in the recess 126 by a pair of screws 143 which thread into countersunk holes 144 at the periphery of the recess 126 in the back of the door 25. These screws 143 have enlarged heads 146, which, when seated in the holes 144, overlie the edge of the ring 127, thereby securing it for rotatable movement within the recess 126.

As shown in Figs. 2 and 6, the ring 127 has an inner periphery 149 which is larger than the circumference of the body 55 of the syringe case 50. Accordingly, when the syringe 32 is inserted in the jacket 31, the proximate end 56 of the syringe case 50 extends through and is surrounded by the inner periphery 149 of the ring 127. Asymmetric keyway structure, preferably in the form of three slots or notches 151, 152 and 153 (Fig. 6) are provided in the edge of the proximate end 56 of the body 55 of the syringe case 50. The spacings between adjacent pairs of the notches 151-153 differ from each other. Formed integrally of the ring 127 and projecting inwardly from the inner periphery 149 thereof are three tabs or keys 155, 156 and 157. These tabs 155-157 are spaced so as to fit into the respective

- 32 -

notches 151-153 in the proximate end 56 of the body 55 of the syringe case 50 so as to rotate the syringe 32 as the mechanism 125 is rotated through actuation of the handle 138. Because the

5 notches 151-153 and the tabs 155-157 are unequally spaced, they can only engage each other when the syringe 32 is inserted into the jacket 31 in one and only one orientation. That orientation is one which will cause the slot 62 of the collar 52 (Fig.

10 3) to align 45° counterclockwise of the vertical when the mechanism 125 is in its unlocked position, which is a position in which it will be when the syringe is first inserted into the jacket 31, and to be in an upwardly facing orientation, when fully

15 loosened, when the mechanism 125 is moved to its locked position. Accordingly, the notches 135 and 136 in the recess 126, which receive the loops 133 of the spring clip 131 when respectively in the locked and unlocked positions, are 45° apart.

20 The rotation of the mechanism 125 from the unlocked position to the locked position rotates the syringe 32 in the jacket 31 and rotates the cap such that its threads move from an unlocked position as shown in Fig. 4 to the locked position

25 of Fig. 5, to secure the cap to the jacket 31 by the engagement and tightening of the threads 85 and 86.

- 33 -

The translational movement of the axes 40 and 41 with respect to the axis 112 is achieved by a fixed cylindrical cam follower or pin 150 which projects outwardly from the fixed housing portion 22 behind the ring 127 and into a cam slot 154 formed therein. The slot 154 is shaped so that the axes 40 and 41 which remain fixed with respect to the ring 127, along with the door 25, the jacket 31, the syringe 32 and all of the structure mutually carried thereby, are moved in relation to the axis 112 of the shaft 105 and the other structure mutually carried by the housing 22, as the mechanism 125 is rotated. These axes move toward and away from each other in accordance with the shape of the slot 154 determined by the radial distance from the point along the slot 154 where it engages the pin 150 to the axes 40 and 41.

The cam slot 154 in the ring 127 is shaped such that, when the mechanism 125 is in the locked position as shown, for example, in Figs. 6 and 7, the distance between the pin 150 and the axes 40 and 41 is at a minimum and the axis 112 coincides with the axes 40 and 41. This is illustrated in Figs. 5 and 7 wherein the coupling 96 is shown positioned between the jaws 114 and in mutual engagement therewith. When the mechanism 125 is in the unlocked position, with

- 34 -

the loops 133 of clip 131 in the notches 135 (Fig. 6) of the recess 126, the pin 150 lies in the slot 154 in the position shown in Fig. 8, which is farther displaced from the axes 40 and 41 than in the position of Figs. 6 and 7, so that the coupling 96 is translated to a position outside of the center line of the jaws 114, as shown in Fig. 8 and further illustrated in Fig. 4.

In the release position, as shown in Fig. 9, the pin 150 is positioned at the open end 160 of the cam surface of the slot 154 so that the door 25 can be rotated upwardly about the hinge pin 26, as shown in Fig. 9, to open the space behind the door 25 for access thereto. This position may be used for cleaning the area behind the door 25 which is sometimes necessary because of possible leakage of fluid from the cavity 61 into the space behind the plunger 54. This can possibly occur because the fluid within the cavity 61, when being injected by forward advancement of the plunger 54, may be of relatively high pressure in the range, usually over 200 psi. For applications such as the injection of contrasting fluid for CT scanning, pressure may typically be in the range of from 25 to 300 psi., while in some angiographic injection applications the pressure may range to 1200 psi or higher.

- 35 -

In addition, leakage rearwardly along the exterior of the neck 59 of the syringe 32 can cause fluid to flow between the body portion 55 of the syringe 32 and the jacket 31. For this reason, the cap 51 is caused to fit snugly against the forward surface of the conical portion 57 of the syringe 32 at least sufficiently to restrict the flow of this leaking fluid onto the neck 59. This is assisted by the configuration of the cap 51 at the rim 87 thereof so as to divert away from the space between the syringe 32 and jacket 31 fluid which might leak from the nozzle.

The front of the housing 21 has formed thereon a door stop 185 having a slot 186 formed therein for receiving a lug 187 of the door 25, to restrain the door 25 against forward force exerted by the drive 100. Behind the front of the housing 21 adjacent the stop 185 is a magnetic sensor 188, which is responsive to the presence of a magnet 189 in the lever arm 139 of the handle 138. The sensor 188 generates a signal to the control module 16 to activate the drive 100 only when the mechanism 125 is in its locked position.

Referring to Fig. 13, there is illustrated a locking mechanism 225 that is an alternative to the locking mechanism 125 described above. In the locking mechanism 225, a stationary

- 36 -

geared rack 250 is provided fixed to the housing
21. A mating gear segment 254 is formed on the
outer rim of the alternative locking ring 227 of
this embodiment. The gear segment 254 and rack 250
5 replace and function in the same way as the slot
154 and pin 150 of the embodiment described above.
As the mechanism 225 is rotated by the handle 138,
the door 25 that carries the jacket 31 and the
syringe 32 is translated to bring the coupling 96
10 into or out of engagement with the jaws 114 of the
drive 100. Simultaneous with this translatory
motion, the syringe 32 is rotated in the jacket 31
to lock or unlock the syringe 32 to the jacket 31
by engagement or disengagement of the threads 86 on
15 the syringe 32 with the threads 85 on the jacket
32.

Fig. 14 illustrates an alternative to
the embodiment of the coupling 96 described above.
In the embodiment of Fig. 14, there is provided a
20 coupling 296 that is T-shaped, having a rectangular
endpiece 298 at the rearward end of a cylindrical
or square shaft 297 on the rearwardly facing
circular surface 95 of the plunger 54. Such a
coupling 296 engages the jaws 114 by rotation of
25 the locking mechanism 125 or 225, preferably
through an angle of 90°. When the orientation of
the endpiece 298 is parallel to the plane of the

- 37 -

5 jaws 114, the drive 100 is locked to the plunger 54 so that axial movement of the drive 100 moves the plunger axially, in the forward direction to expel fluid from the syringe cavity 61, or in a rearward direction to fill the cavity 61 with fluid. When the endpiece 298 is perpendicular to the plane of the jaws 114, the coupling 296 will move into or out of engagement with the jaws 114 upon relative axial movement between the plunger 54 and the drive 100. Thus, with this embodiment, rotational motion, rather than translational motion, causes engagement and disengagement of the coupling 296 by the jaws 114. With this embodiment, orientation of the syringe 32, when loaded into the jacket 31, is preferably maintained through the cooperation of the notches 151-153 and the tabs 154-156 (Fig. 4), so that the coupling 296 will enter the jaws 114, when the syringe 32 is inserted into the jacket 31, with the endpiece 298 perpendicular to the pair of jaws 114.

The locking structure between the syringe 32 and the pressure jacket 31 should provide for retention of the syringe 32 in the jacket 31 against the force of the fluid pressure in the cavity 61 or axial force otherwise exerted on the plunger 54 by the drive 100. This locking of the syringe 32 to the jacket 31 is preferably achieved,

- 38 -

as shown in Fig. 5, by structure at or near the forward wall 57 of the syringe case 50. In accordance with the embodiment of Fig. 15, such structure may include external threads 200 on the forward end of the syringe body 257, which mate with internal threads 201 at the remote end of the jacket 31. With such an embodiment, the syringe 32 is preferably provided with an annular flange 203 around the body 257 at the juncture of the body 257 with the syringe front wall 258. The flange 203 inhibits the flow of leaked fluid into the space between the syringe body 257 and the jacket 31. With such an embodiment, the wall 258 is either thickened, provided with reinforcing such as the ribs 208, or provided with other structure to resist deformation of the wall 258 under the pressure of the fluid within the cavity 61.

Alternatively, a reusable split clip 210 may be employed to secure a continuous flange 203 of such a syringe to a continuous flange 212 at the end of the pressure jacket in the embodiment of Figs. 16. As a further alternative as shown in Fig. 17, a ring clip 210a having an outer rim 215 and rotatably mounted to the syringe 31, encircles and engages outwardly projecting threads of a disk flange 213 formed at the front end of the jacket 31, as the syringe 32 is twisted onto the jacket

- 39 -

31, to engage the jacket in a manner similar to the threads 85 and 86 in the embodiment of Figs. 2-12 above.

5 The invention has been described in the context of its preferred embodiments. It will be appreciated by those skilled in the art that variations and alternatives to the embodiments described may be employed without departing from the principles of the present invention.

10 Accordingly, this patent is not intended to be limited except by the scope of the following claims:

- 40 -

1. A front loadable injector for injecting liquid into the body of an animal, the injector comprising:

a housing;

5 a pressure jacket carried by the housing and having a cylindrical bore therethrough for receiving a cylindrical syringe therein, the jacket having an open back end communicating with the housing and an open front end for insertion of the syringe into the bore and removal of the syringe from the bore, the bore having a longitudinal axis;

10 a removable syringe mountable in the bore through the front end of the jacket, the syringe having:

15 a cylindrical body having open back and front ends,

a forward facing truncated conical front wall located adjacent the front end of the pressure jacket when the syringe is mounted in the bore, the wall having a back end fixed to the front end of the body and a front end, and

20 a discharge neck fixed to and extending forwardly from the front end of the conical front wall and having a discharge orifice at the front end thereof,

25

- 41 -

the body, front wall and neck
enclosing a fluid-tight cavity communicating
between the back end of the syringe body and
30 the orifice, the body of the syringe having an
axis parallel to and in axial alignment with
the axis of the bore when the syringe is
mounted therein,

a plunger slidably supported in the
35 cavity of the syringe and moveable axially
therein between the back end and the front end
of the body, the plunger forming a fluid tight
seal with the body, the plunger having a
forward facing surface forming a moveable rear
40 wall of the cavity and having a rearward
facing surface having a drive means engaging
coupling thereon located on and symmetrical
about the axis of the body;

plunger drive means carried by the
45 housing for axially driving the plunger of a
syringe mounted in the bore when engaged with the
coupling, the drive means including means
extendable through the open back end of the jacket
for engaging the coupling upon forward axial
50 movement thereagainst and for otherwise forwardly
and rearwardly axially driving the plunger when
engaged with the coupling to exert axial force on
the plunger, the drive means further including

- 42 -

55 means for engaging the coupling with translational
relative movement toward the axis of the body and
for disengaging the coupling with translational
relative movement away from the axis of the body;
and

60 means, carried in part by the syringe
near the conical front wall thereof and in part by
the pressure jacket near the front end thereof, for
releasably securing the syringe to the pressure
jacket.

- 43 -

2. The injector of claim 1 further comprising:

means carried in part by the housing and in part by structure carried by the syringe for orienting the syringe in a predetermined angular orientation with respect to the housing when the syringe is secured to the pressure jacket.

3. The injector of claim 2 wherein:

the orienting means includes at least some structure in common with the securing means.

4. The injector of claim 3 wherein:

the common structure of the syringe orienting means and the securing means includes cooperating thread segments including segments fixed to the jacket near the front end thereof and mating segments fixed to the syringe near the front wall thereof.

5. The injector of claim 4 wherein:

the thread segments fixed to the jacket are radially outwardly projecting and the mating thread segments fixed to the syringe are radially inwardly projecting.

- 44 -

6. The injector of claim 3 wherein:
the securing means includes means
operative upon the rotation of the syringe with
respect to the housing about the axis of the
5 jacket, for locking the syringe respectively to the
jacket at the predetermined angular orientation and
for unlocking the syringe from the jacket.

7. The injector of claim 6 further
comprising:
means carried by, and mounted for
movement in relation to, the housing for rotating
5 the syringe with respect to the housing between the
predetermined angular orientation at which the
syringe is locked to the jacket and an unlocked
orientation at which the syringe is removable from
the bore.

8. The injector of claim 6 wherein:
the orienting means includes at least
some structure in common with the rotating means.

- 45 -

9. The injector of claim 8 wherein:

the syringe has at least one notch in the back end thereof and the common structure of the orienting means and the rotating means includes at least one key carried by the housing and insertable into the notch when the syringe is in a unique angular orientation with respect to the housing.

5

10. The injector of claim 1 wherein:

the securing means includes means for rotating the syringe with respect to the jacket about the axis of the jacket between a locking orientation for locking the syringe to the jacket when the syringe is mounted in the jacket, and an unlocking orientation for unlocking the syringe for mounting in and removal from the jacket.

5

11. The injector of claim 10 wherein:

the syringe has at least one notch in the back end thereof and the rotating means includes at least one key carried by the housing and insertable in the notch when the syringe is mounted in the bore.

5

- 46 -

12. The injector of claim 1 wherein:

the securing means includes means
operative upon the movement thereof with respect to
the housing for imparting relative translational
5 movement between the drive means and the axis of
the body of the syringe.

13. The injector of claim 12 wherein:

the syringe has at least one notch in the
back end thereof and the movement imparting means
includes at least one a key carried by the housing
5 and insertable in the notch when the syringe is
mounted in the bore.

14. The injector of claim 12 wherein:

the movement imparting means is moveable
between the lock position at which the drive means
engages the coupling and the unlock position at
5 which the drive means is disengaged from the
coupling.

- 47 -

15. The injector of claim 12 wherein:

the housing carries a door portion
openably mounted thereto, the jacket being carried
by the door; and

5 the movement imparting means is further
moveable to a release position at which the door
can be opened and closed to permit access to the
back end of the jacket.

16. The injector of claim 15 wherein the
movement imparting means includes:

means for locking the door closed when
the movement imparting means is in its locked and
5 unlocked positions; and

means for relatively translating the
coupling engaging means and the coupling into and
out of engagement upon movement of the movement
imparting means respectively to and from its
10 release position.

17. The injector of claim 1 wherein:

the syringe has a pressure retaining cap
secured thereto and overlying the forward facing
side of the conical front wall thereof.

- 48 -

18. The injector of claim 17 wherein:

the securing means is carried at least in part by the cap.

19. The injector of claim 1 further comprising:

means carried in part by the housing and in part by the syringe for orienting a the syringe in a predetermined first angular orientation with respect to the housing when the syringe is secured to the pressure jacket; and

the coupling and drive means are engageable for movement of the syringe to and from in the predetermined first angular orientation.

20. The injector of claim 19 wherein:

the securing means includes means operative upon the movement thereof with respect to the housing for imparting relative rotational movement between the drive means about the axis of the body of the syringe to rotate the syringe between the predetermined first angular orientation at which the coupling is engaged with the drive means and a second angular orientation at which the coupling is disengaged from the drive means.

- 49 -

21. An injector for injecting liquid into the body of an animal, the injector comprising:

an injector unit having a jacket supported thereto, the jacket having a bore extending longitudinally therethrough, an open front end for receiving in the bore a replaceable syringe, and a back end having a plunger drive receiving opening therein;

a replaceable syringe removeably mountable in the bore, the syringe having a front end and a back end, a fluid discharge orifice at the front end thereof and an opening in the back end thereof;

the syringe having a longitudinally extending body insertable into the jacket and dimensioned generally to conform to the bore, a fluid holding cavity therein at least partly contained in the body, and a plunger slidably mounted in the body for expressing fluid from, and drawing fluid into, the cavity through the orifice upon the longitudinal movement of the plunger;

the unit including a plunger drive carried thereby and longitudinally extendable through the opening in back end of the jacket, and through the opening in the back end of a syringe when the syringe is mounted in the bore of the jacket, the drive having thereon a plunger engaging

- 50 -

element engageable with the plunger when the
syringe is inserted in the bore to longitudinally
30 move the plunger forward and rearward in the bore;
and

locking structure carried at least
partially by the syringe near the front end
thereof, the locking structure being lockable to
35 the jacket proximate the front end thereof to lock
the syringe in the jacket while the liquid is being
injected.

- 51 -

22. The injector of claim 21 wherein:

the locking structure includes a pressure retaining cap at the front end of the syringe having a rim securable to the front end of the pressure jacket.

5

23. The injector of claim 22 wherein:

the cap is formed of material separate from the body of the syringe.

24. The injector of claim 21 wherein:

the locking structure includes mating locking members, including at least one carried by the syringe and at least one carried by the pressure jacket, configured and positioned to secure and release the syringe to and from the jacket upon the relative movement of members with respect to each other.

5

- 52 -

25. The injector of claim 24 further comprising:

5 a relative movement imparting mechanism connectable between the syringe and the unit when the syringe is mounted in the jacket, the mechanism being operable to impart relative movement between the locking members of the syringe and the jacket to lock the syringe to and unlock the syringe from the jacket.

26. The injector of claim 25 wherein:

5 the movement imparting mechanism is operable to impart relative movement between the plunger engaging element of the plunger drive and the plunger to relatively move the plunger engaging element into and out of driving engagement with the plunger.

27. The injector of claim 26 wherein:

5 the relative movement between the locking members is rotational and the relative movement between the plunger and the plunger engaging element is transverse.

- 53 -

28. The injector of claim 27 wherein:

the transverse movement between the locking members is rotational movement about an axis parallel to the jacket bore.

29. The injector of claim 28 wherein:

the transverse movement between the plunger and plunger engaging element is translatory movement with respect to the axis of the bore.

30. The injector of claim 27 wherein:

the transverse movement between the plunger and plunger engaging element is rotational movement about an axis parallel to the jacket bore.

31. The injector of claim 21 further

comprising:

means carried in part by the unit and in part by the syringe for restricting the permissible angular orientation of the syringe with respect to the unit when the syringe is mounted in the bore of the jacket.

- 54 -

32. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has a pressure jacket having a longitudinal cylindrical internal bore in which a syringe is supported surrounded by a pressure withstanding side wall for restraining the syringe supported therein against radial expansion when filled with liquid at the predetermined operating pressure, and having an open front end through which a syringe is loadable into and unloadable from the bore and locking structure proximate the front of the jacket, the injector having a plunger drive longitudinally moveable in the bore, the syringe comprising:

a hollow tubular body having a liquid holding cavity at least partially enclosed therein, a back end with an opening therein and a front end, the body being outwardly deformable at the predetermined operating pressure and configured and dimensioned to form a pressure contact with the jacket when received in the bore thereof and when liquid at the predetermined operating pressure is contained within the cavity, the back end having a flangeless outer periphery configured and dimensioned to pass through the front end of the jacket;

- 55 -

30 a forward facing front wall at the front end thereof and sufficiently strong to resist substantial deformation and rupturing when liquid at the predetermined pressure is contained within the cavity, the front wall having a liquid discharge outlet thereon;

35 a plunger slidably supported in the cavity and moveable longitudinally therein between the back end and the front end of the body, the plunger forming a fluid tight seal with the body, the plunger having a forward facing surface forming a moveable rear wall of the cavity and a rearward
40 facing surface having a drive engaging coupling thereon positioned and configured to be engageable by the plunger drive through the opening at the back end of the syringe when the syringe is supported in the bore;

45 means, carried by the syringe proximate the front wall thereof, for releasably securing the syringe to the pressure jacket and for forming a connection therebetween sufficiently strong to retain the syringe in the pressure jacket when the
50 plunger drive advances the plunger within the tubular body and the pressure of the liquid in the cavity reaches the predetermined operating pressure.

- 56 -

33. The syringe of claim 32 for an injector wherein the bore of the jacket of the injector is cylindrical and has a longitudinal axis, wherein:

the syringe body is cylindrical;

5 the forward wall of the syringe has a truncated cone having its large end fixed to the front end of the syringe body and its small end extending forward; and

the syringe has a discharge neck sealed to and extending from the small end of the forward wall, the neck having a discharge orifice at the front end thereof ;

10 the body, front wall and neck enclosing a fluid-tight cavity communicating between the back end of the syringe and the orifice.

34. The syringe of claim 32 for an injector having a housing, the syringe further comprising:

means carried thereby for orienting the syringe in a predetermined angular orientation with respect to the housing when the syringe is secured to the jacket.

5

- 57 -

35. The syringe of claim 34 wherein:

the orienting means includes at least one notch in the back end of the syringe body.

36. The syringe of claim 34 wherein:

the orienting means includes three unequally spaced notches in the back end of the syringe body.

37. The syringe of claim 32 wherein:

the securing means includes thread structure fixed to the syringe proximate the front end of the body thereof.

38. The syringe of claim 37 wherein:

the thread segments are radially inwardly projecting.

39. The syringe of claim 32 wherein:

the securing means includes means operative upon the rotation of the syringe with respect to the jacket for locking and unlocking the syringe respectively to and from the jacket.

- 58 -

40. The syringe of claim 39 further comprising:

means carried thereby for engaging a mechanism carried by the injector and rotating the syringe with respect to the jacket.

5

41. The syringe of claim 32 wherein:

the syringe has a pressure retaining cap secured thereto and overlying the front wall on the forward facing side thereof.

42. The syringe of claim 41 wherein:

the securing means is carried by the cap.

43. The syringe of claim 32 further comprising:

a coupling carried by the plunger; and the coupling and drive being engageable and disengageable upon the rotation of the coupling with respect to the drive.

5

44. The syringe of claim 32 further comprising:

means proximate the front end of the body thereof for diverting fluid away from the space between the jacket and the syringe.

5

- 59 -

45. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has a pressure jacket having a longitudinal cylindrical internal bore in which a syringe is supported surrounded by a pressure withstanding side wall for restraining the syringe supported therein against radial expansion when filled with liquid at the predetermined operating pressure, and having an open front end through which a syringe is loadable into and unloadable from the bore and stationary locking structure proximate the front of the jacket, the injector having a plunger drive longitudinally moveable in the bore and a rotational locking mechanism at the back end of the jacket, the syringe comprising:

a hollow cylindrical body having a fluid holding cavity at least partially contained therein, a front end, and a back end;

the back end of the syringe having a flangeless outer periphery configured and dimensioned to fit through the open front end of the jacket, a plunger drive receiving opening therethrough and at least one notch in the periphery thereof;

the body being configured and dimensioned to approximately contact the jacket when loaded in

- 60 -

the bore , and to be rotatable within the bore when the cavity is at ambient pressure by engagement of the notch by the locking mechanism;

30 a pressure restraining front wall sealed to the front end of the body and having a fluid discharge outlet therethrough that communicates with the cavity, the front wall being sufficiently strong to withstand liquid in the syringe at the

35 predetermined operating pressure;

a plunger slidably supported in the body and moveable longitudinally therein between the back end and the front end of the body, the plunger

40 forming a fluid tight seal with the body, the plunger having a forward facing surface forming a moveable rear wall of the cavity and having a rearward facing surface having a drive engaging coupling positioned thereon and configured to be

45 engageable by the plunger drive through the opening at the back end of the syringe when the syringe is loaded in the bore; and

locking structure carried by the syringe proximate the front end thereof and structurally

50 connected to the front wall of the syringe, the locking structure being engageable with the stationary locking structure of the pressure jacket to hold the syringe, when the plunger drive advances the plunger within the cavity and the

- 61 -

55 pressure of the liquid in the cavity reaches the
predetermined operating pressure, in pressure
retaining engagement with the jacket when locked
thereto, the locking structure being locked and
unlocked by the rotation of the syringe in the bore
60 upon rotation of the locking mechanism engaged with
the notch.

- 62 -

46. The syringe of claim 45 wherein:

the locking structure includes a pressure retaining cap fixed to the front end of the syringe body, the cap having an outer periphery securable to the front end of the pressure jacket.

5

47. The syringe of claim 46 wherein:

the cap is formed of material separate from the body of the syringe.

48. The syringe of claim 45 wherein:

the locking structure includes threads configured to cooperate with mating threads on the jacket.

49. The syringe of claim 45 further comprising:

orienting structure configured to cooperate with structure carried by the housing so as to restrict the possible angular orientations at which the syringe can be supported in the bore of the jacket.

5

- 63 -

50. The syringe of claim 49 wherein the orienting structure includes:

5 structure located proximate the back end of the syringe configured to cooperate, when the syringe is loaded in the bore of the jacket, with structure carried by the housing proximate the back end of the jacket.

51. The syringe of claim 49 wherein:

the orienting structure includes threads configured to cooperate with mating threads on the jacket.

52. The syringe of claim 51 wherein:

the threads on the syringe and on the jacket each include four thread sections equally spaced around the body of the syringe.

53. The syringe of claim 49 wherein:

the angular orientation determining surfaces include three notches unequally spaced around the back edge of the body of the syringe.

- 64 -

54. The syringe of claim 45 wherein:

the coupling extends rearwardly from the center of the rearward facing surface of the plunger and has an enlarged end configured to remain in driving engagement with the drive to move longitudinally therewith and to disengage the drive only upon relative transverse movement of the coupling with respect to the drive.

55. The syringe of claim 54 wherein:

the coupling is axially symmetrical about the center of the rearward facing surface of the plunger and is thereby disengageable from the drive only upon relative translational movement of the coupling with respect to the drive.

56. The syringe of claim 54 wherein:

the coupling is axially asymmetrical about the center of the rearward facing surface of the plunger and is thereby disengageable from the drive upon relative rotational movement of the coupling with respect to the drive.

- 65 -

57. The syringe of claim 45 wherein:

the syringe includes movement imparting structure configured to cooperatively engage a mechanism carried by the housing to move the syringe with respect to the housing to lock the syringe to the jacket.

58. The syringe of claim 57 wherein:

the coupling is configured to engage and disengage the plunger drive upon movement of the syringe with respect to the jacket that is imparted through the engagement of the coupling and plunger drive.

59. The syringe of claim 58 wherein:

the movement of the syringe with respect to the jacket is rotational movement and is combined with rotational movement of the plunger drive with respect to the coupling.

60. The syringe of claim 58 wherein:

the movement of the syringe with respect to the jacket is rotational movement and is combined with translational movement of the plunger drive with respect to the coupling.

- 66 -

61. The syringe of claim 55 wherein:
the translational movement of the plunger
drive with respect to the coupling is transverse
translational movement.

- 67 -

62. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has a jacket having a longitudinal cylindrical internal bore in which a syringe is supported surrounded by a side wall for supporting a syringe therein against radial expansion when filled with liquid at the predetermined operating pressure, and having an open front end through which a syringe is loadable into and unloadable from the bore and locking structure proximate the front of the jacket, the injector having a plunger drive longitudinally moveable in the bore, the syringe comprising:
- 15 a hollow tube having a fluid holding cavity at least partially contained therein, a front end, and a back end;
 - the back end of the tube having a flangeless outer periphery configured and
 - 20 dimensioned to fit through the open front end of the jacket and a plunger drive receiving opening therethrough;
 - the tube being configured and dimensioned to fit within the jacket when loaded in the bore
 - 25 thereof when liquid at operating pressure is contained within the cavity, and to be slidable within the bore;

- 68 -

30 a pressure restraining front wall sealed to the front end of the tube and having a liquid discharge outlet therethrough that communicates with the cavity, the front wall being sufficiently strong to withstand liquid in the syringe at the predetermined operating pressure;

35 a plunger slidably supported in the tube and moveable longitudinally therein between the back end and the front end of the tube, the plunger forming a fluid tight seal with the tube, the plunger having a forward facing surface forming a moveable rear wall of the cavity and having a
40 rearward facing surface having a drive engaging coupling positioned thereon and configured to be engageable by the plunger drive through the opening at the back end of the syringe when the syringe is loaded in the bore; and

45 means carried by the syringe near the front end thereof for engaging the locking structure of the jacket and forming a connection between the front wall of the syringe and the locking structure of the jacket to hold the syringe
50 in engagement with the jacket when the plunger drive advances the plunger within the tube and the pressure of the liquid in the cavity reaches the predetermined operating pressure.

- 69 -

63. A front loadable injector for injecting fluid into the body of an animal, the injector comprising:

a housing;

5 a pressure jacket carried by the housing and having a bore therethrough for receiving a cylindrical syringe therein, the jacket having an open front end for insertion of the syringe into the bore and removal of the syringe from the bore,
10 the bore having a longitudinal axis;

a removable syringe mountable in the bore through the front end of the jacket;

a pressure restraining front wall and means, carried in part by the front wall and in
15 part by the pressure jacket proximate the front end thereof, for releasably securing the syringe to the pressure jacket;

the syringe having a body portion insertable into the bore of the pressure jacket,
20 the body portion having an interior surface;

a plunger slidably supported in the cavity of the syringe and moveable axially therein, the plunger having a drive means engaging coupling thereon;

25 plunger drive means carried by the housing and longitudinally extendable in the bore

- 70 -

from the back end of the jacket for axially driving
the plunger of a syringe mounted in the bore; and

the jacket and syringe being dimensioned
30 and configured to prevent contact between the
interior surface of the body of the syringe and the
drive means as the syringe is being inserted in the
bore.

- 71 -

64. A method of loading a syringe in an injector having a pressure jacket with a bore therethrough and an open front end, wherein the syringe has a hollow tubular body, a plunger slidably mounted in the body that has a drive engaging coupling on rearwardly extending therefrom, a back end and a pressure restraining front end that has a fluid dispensing orifice therein, the method comprising the steps of:
- 5 inserting the body of the syringe longitudinally into the bore of the jacket, back end first, through the open front end of the jacket, with the body of the syringe in pressure restraining relationship with the jacket while the
 - 10 drive is at an extended position in the bore;
 - 15 connecting the front end of the syringe to the front end of the jacket;
 - translating the drive transversely with respect to the coupling from the extended position
 - 20 and into drivable engagement with the coupling;
 - retracting the drive to retract the plunger and thereby filling the syringe with fluid drawn in through the orifice.

- 72 -

65. A method of removing a syringe from an injector having a jacket with a bore therethrough and an open front end, the syringe having a hollow body mounted in the bore of the jacket, a plunger
5 slidably mounted in the body, a back end and a pressure restraining front end that is connected to the front end of the jacket and has a liquid dispensing orifice therein, wherein the syringe has an injection tube connected to at the orifice, the
10 method comprising the steps of:

disconnecting the front end of the syringe from the front end of the jacket; and

removing the body of the syringe from the bore of the jacket, through the open front end of
15 the jacket, without disconnecting the tube from the orifice of the syringe.

- 73 -

66. A method of inserting a syringe into an injector having a jacket with a syringe receiving space at least partially surrounded thereby and an open front end, the method comprising the steps of:

5 providing a syringe having a hollow body, a plunger slidably mounted in the body, a back end and a pressure restraining front end that has a fluid dispensing orifice therein;

10 inserting the body of the syringe into the bore of the jacket, back end first, through the open front end of the jacket; and

 connecting the front end of the syringe to the front end of the jacket.

- 74 -

67. The method of claim 66 further comprising the steps of:

5 simultaneous with the connecting of the front end of the syringe with the front end of the jacket, connecting the coupling to the drive.

68. The method of claim 67 wherein:

the connecting steps include the step of rotating the syringe with respect to the jacket.

69. The method of claim 67 wherein:

the coupling and drive connecting step includes the step of translating the syringe with respect to the drive; and

5 the syringe front end and jacket front end connecting step includes the step of rotating the syringe with respect to the jacket.

70. The method of claim 67 wherein:

the coupling and drive connecting step includes the step of transversely translating the syringe with respect to the drive; and

5 the syringe front end and jacket front end connecting step includes the step of rotating the syringe with respect to the jacket.

- 75 -

71. The method of claim 66 further comprising the steps of:

disconnecting the front end of the syringe from the front end of the jacket.

72. The method of claim 71 further comprising the steps of:

simultaneous with the disconnecting of the front end of the syringe from the front end of the jacket, disconnecting the coupling from the drive..

73. The method of claim 72 wherein:

the disconnecting steps include the step of rotating the syringe with respect to the jacket.

74. The method of claim 71 wherein:

the coupling and drive disconnecting step includes the step of transversely translating the syringe with respect to the drive; and

the syringe front end and jacket front end disconnecting step includes the step of rotating the syringe with respect to the jacket.

- 76 -

75. A method of replacing a first syringe that is secured to a pressure jacket of an injector with a second syringe, the injector having a plunger drive carried thereby and each syringe a plunger moveable therein with a drive engaging coupling thereon, the first syringe being initially engaged with the pressure jacket and the coupling of the first syringe being initially engaged with the plunger drive, the method comprising the steps of:

moving the first syringe with respect to and out of engagement with the pressure jacket and simultaneously moving the coupling of the first syringe with respect to and out of engagement with the plunger drive;

removing the first syringe from the pressure jacket and inserting the second syringe into the pressure jacket; and

moving the second syringe with respect to and into engagement with the pressure jacket and simultaneously moving the coupling of the second syringe with respect to and into a position for engagement with the plunger drive.

- 77 -

76. The method of claim 75 wherein:

the movements of the syringes with
respect to the jacket are rotational movements.

77. The method of claim 75 wherein:

the movements of the couplings with
respect to the drive are rotational movements.

78. The method of claim 75 wherein:

the movements of the couplings with
respect to the drive are transverse translational
movements.

79. The method of claim 75 for an injector
having a jacket with an open front end, and
wherein:

5 the removal and insertion of the syringes
from and into the jacket include the respective
steps of removing and inserting the syringe from
and into the jacket through the open front end of
the jacket.

- 78 -

80. The method of claim 75 wherein:

the movements of the couplings with
respect to the drive and the movements of the
syringe with respect to the jacket are linked to
5 the movement of a common component of the injector.

- 79 -

81. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has a pressure jacket having a

5 longitudinal internal bore in which a syringe is supported surrounded by a pressure withstanding side wall for restraining the syringe supported therein against radial expansion when filled with liquid at the predetermined operating pressure, and

10 having an open front end through which a syringe is loadable into and unloadable from the bore and locking structure proximate the front of the jacket, the injector having a plunger drive longitudinally moveable in the bore, the syringe

15 comprising:

a hollow tube having a fluid holding cavity at least partially contained therein, a front end, and a back end, the tube being outwardly deformable when liquid at the predetermined

20 operating pressure is contained within the cavity;

a pressure restraining front wall sealed to the front end of the tube and having liquid discharge outlet therethrough that communicates with the cavity, the front wall being sufficiently

25 strong to withstand liquid in the syringe at the predetermined operating pressure.

- 80 -

82. The syringe of claim 81 wherein:

the back end of the jacket has at least one notch therein.

83. The syringe of claim 81 wherein:

the tube has a flangeless back end and a uniform cross-sectional diameter; and

the syringe includes means proximate the front end thereof for locking the syringe to the pressure jacket and forming a connection between the front wall of the syringe and the pressure jacket to hold the syringe in the jacket when liquid is contained in the syringe at the predetermined operating pressure.

84. The syringe of claim 81 wherein:

the front wall of the syringe is dimensioned and configured to extend around the front end of the pressure jacket around the periphery thereof.

- 81 -

85. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has an outer jacket having an open front end through which a syringe is loadable and unloadable and locking structure proximate the front of the jacket, and having external threads at the front end of the jacket, the injector having a plunger drive longitudinally moveable in the bore, the syringe comprising:

a hollow tube having a fluid holding cavity at least partially contained therein, a front end, and a back end;

a front wall sealed to the front end of the tube and having liquid discharge outlet therethrough that communicates with the cavity, the front wall having an outer rim and being configured and dimensioned to extend around the front end of the jacket when the syringe is supported therein with the rim encircling the front end of the jacket; and

internal threads on the rim of the front wall engageable with the threads of the pressure jacket.

- 82 -

86. A method of replacing a first syringe with a second syringe in an injector having a pressure jacket with a bore therethrough and an open front end, wherein each of the syringes has a hollow body, a plunger slidably mounted in the body that has a drive engaging coupling on rearwardly extending therefrom, a back end and a pressure restraining front end that has a fluid dispensing orifice therein, the method comprising the steps of:

10 disconnecting the coupling of the first syringe from the drive means while the drive means is extended substantially into the bore;

 disconnecting the front end of the first syringe from the front end of the jacket and, with
15 the drive substantially extended in the bore and without retracting the drive in the bore, removing the body of the first syringe from the bore of the jacket through the front end thereof;

 inserting the body of the second syringe
20 into the bore of the jacket, back end first, through the open front end of the jacket, with the body of the syringe in pressure restraining relationship with the jacket;

 detachably connecting the front end of
25 the second syringe to the front end of the jacket;
 and

- 83 -

connecting the drive to the coupling of
the second syringe.

- 84 -

87. The method of claim 86 wherein:
the body inserting step occurs with the
drive substantially extended in the bore.

- 85 -

88. A front loadable injector for injecting liquid into the body of an animal at an operating pressure, the injector comprising:

a pressure jacket having a bore
5 therethrough for receiving a syringe therein, the jacket having an open front end for insertion of the syringe into the bore and removal of the syringe from the bore and a pressure restraining side wall, the front end of the jacket having no
10 pressure restraining capability, the bore having a longitudinal axis;

a removable syringe mountable in the bore through the front end of the jacket, the syringe having a hollow body having a pressure restraining
15 front wall and a tubular body outwardly deformable when containing liquid at operating pressure; and

means, carried in part by the syringe proximate the conical front wall thereof and in part by the pressure jacket proximate the front end
20 thereof, for releasably forming a force restraining connection between the syringe front wall and the front end of the pressure jacket to hold the syringe in the pressure jacket when the plunger drive advances the plunger within the body and the
25 pressure of the liquid in the cavity reaches the operating pressure.

- 86 -

89. A disposable replacement syringe for a front loadable injector for injecting liquid into an animal at a predetermined operating pressure, and which has an outer jacket, having an open front end through which a syringe is loadable and unloadable, the syringe comprising:

a hollow tube having a fluid holding cavity at least partially contained therein, a front end, and a back end; and

a front wall sealed to the front end of the tube and having liquid discharge outlet therethrough that communicates with the cavity, the front wall having an outer rim and being configured and dimensioned to extend around the front end of the jacket when the syringe is supported therein with the rim encircling the front end of the pressure jacket.

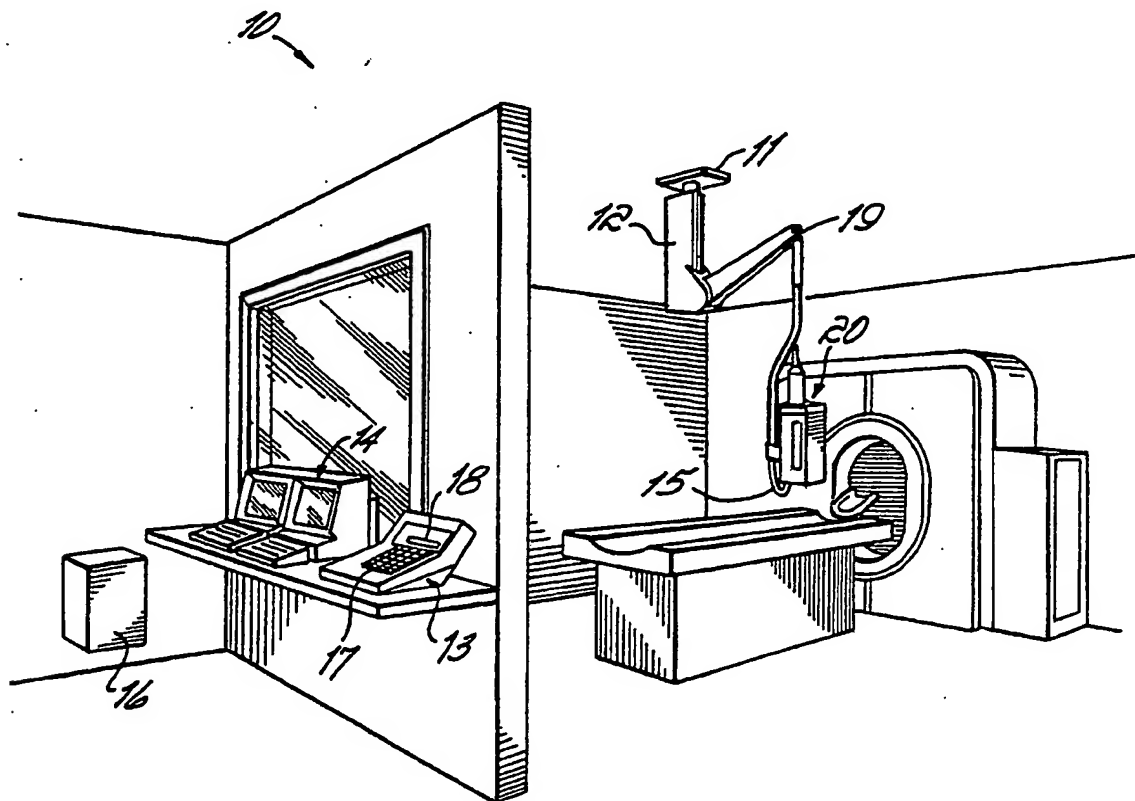


FIG. 1

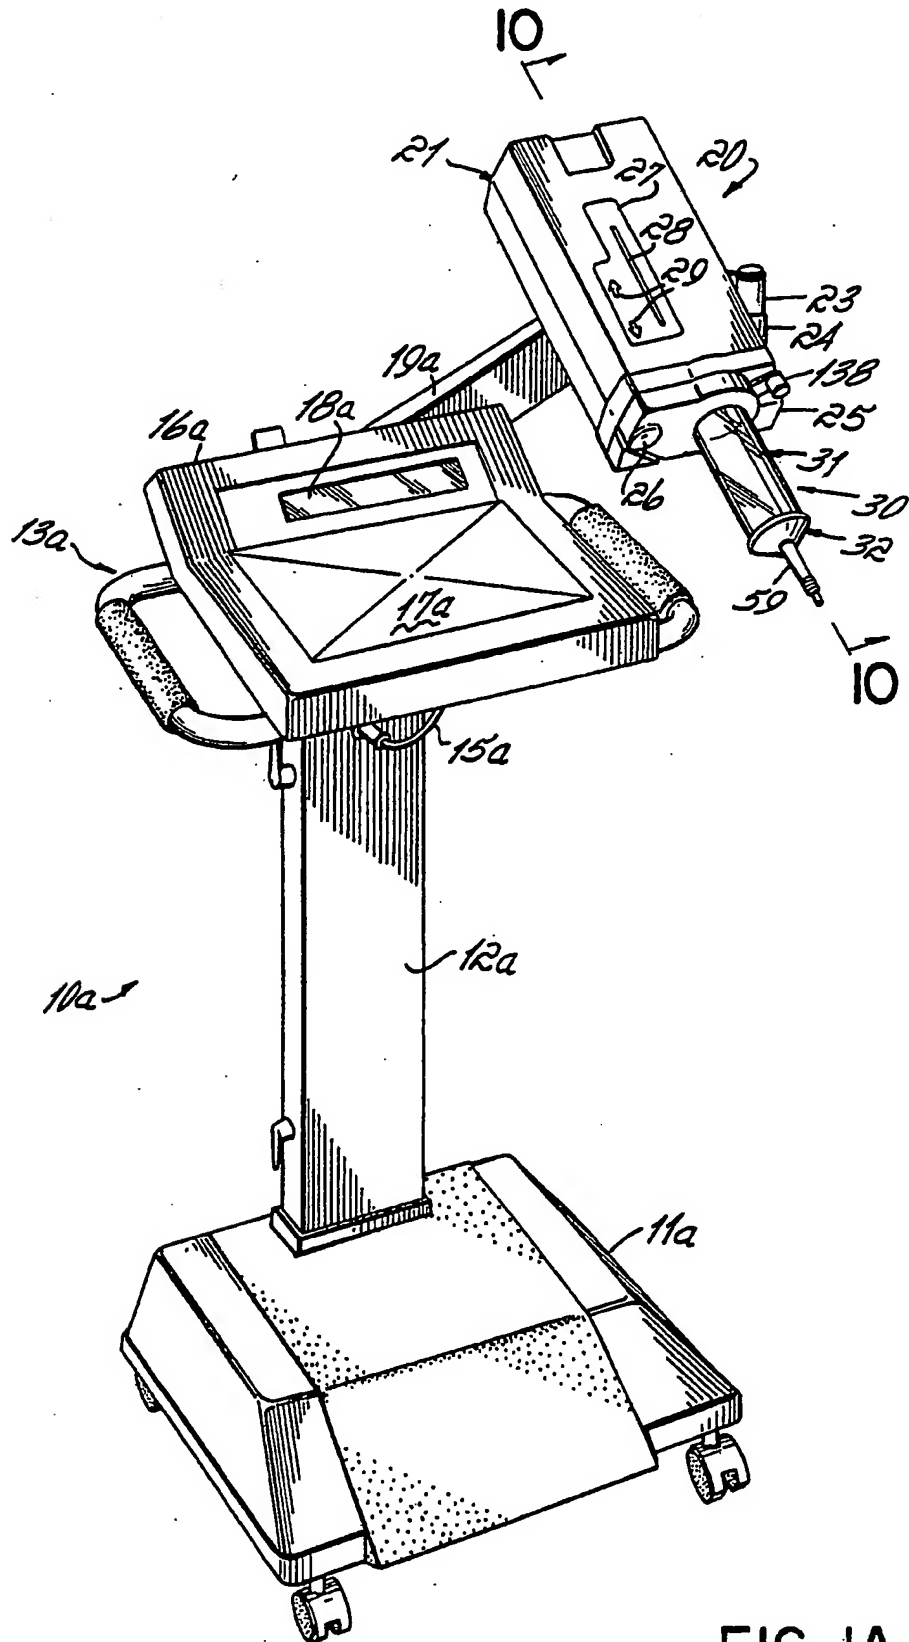


FIG. 1A

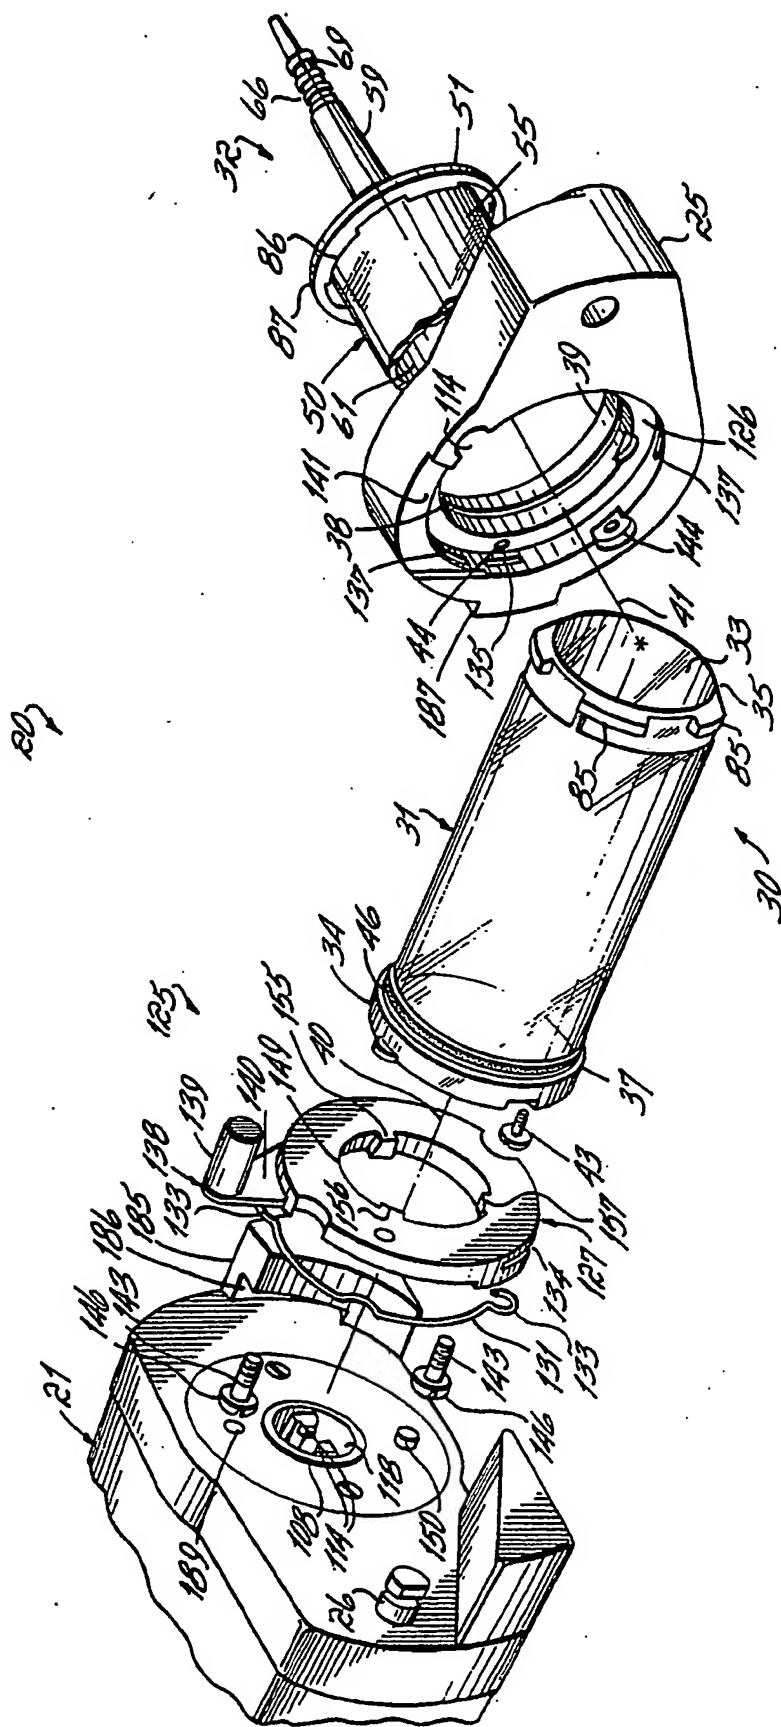


FIG. 2

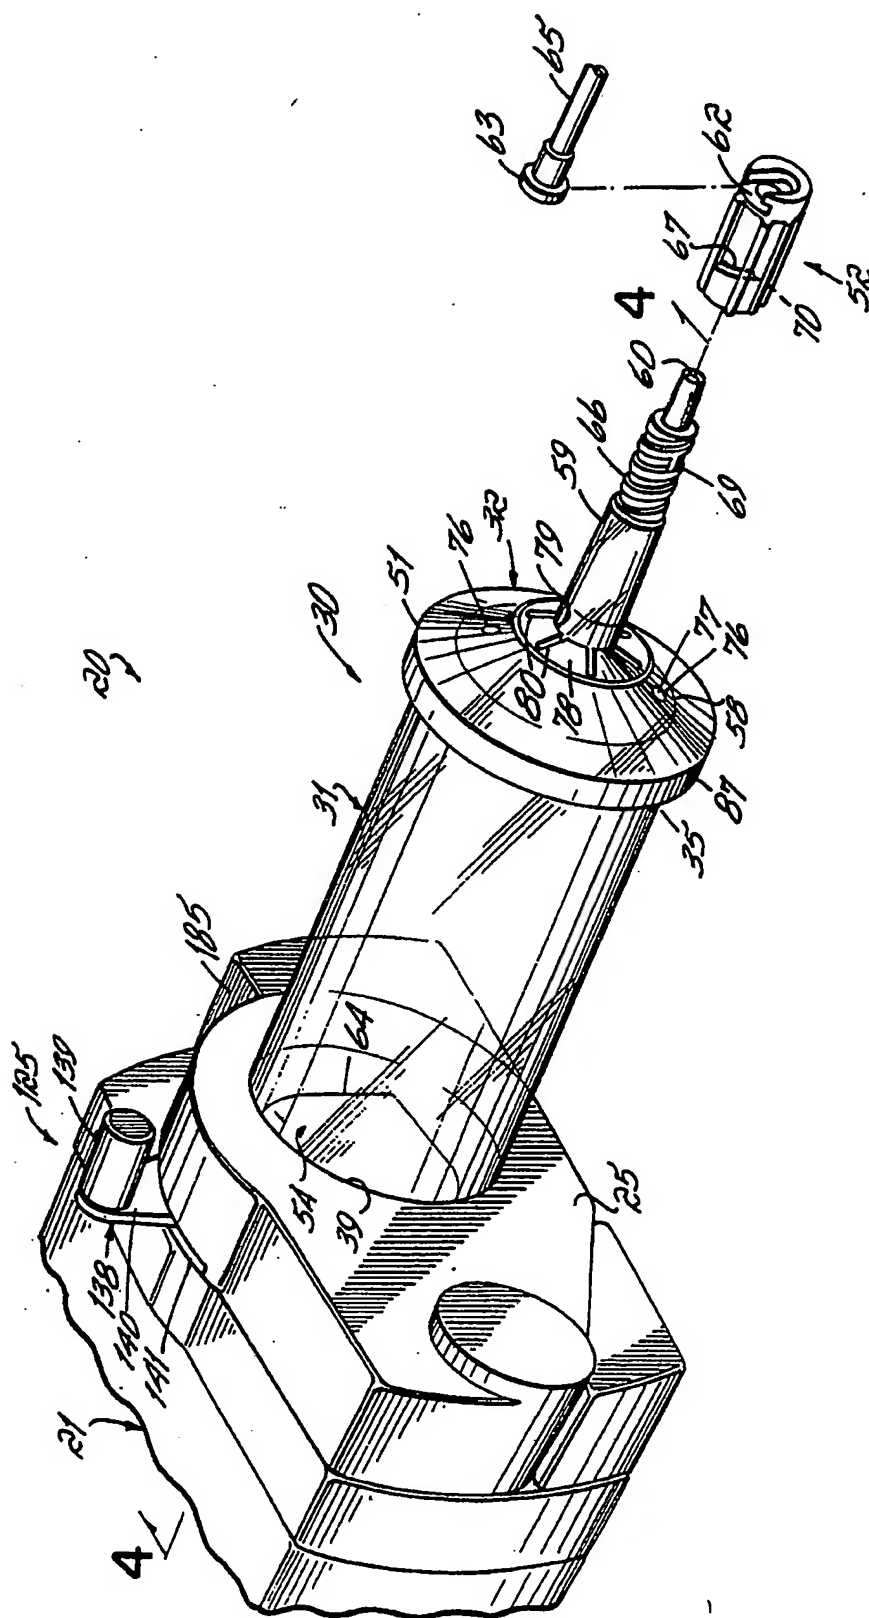


FIG. 3

5/11

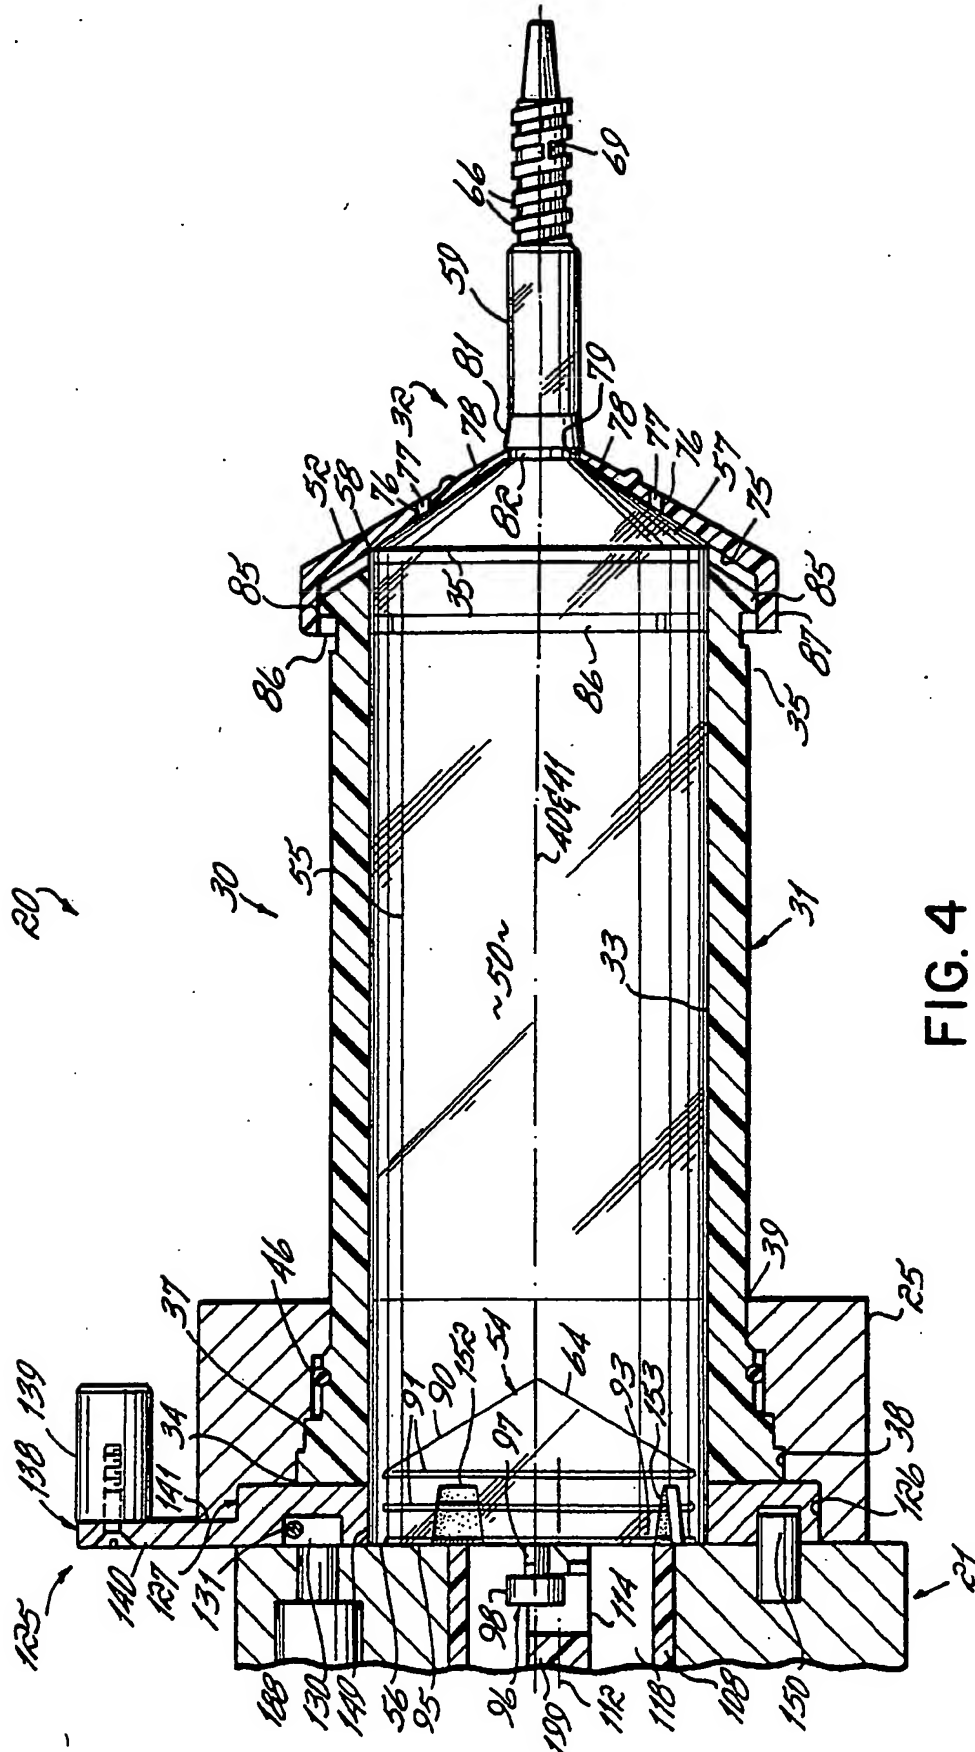
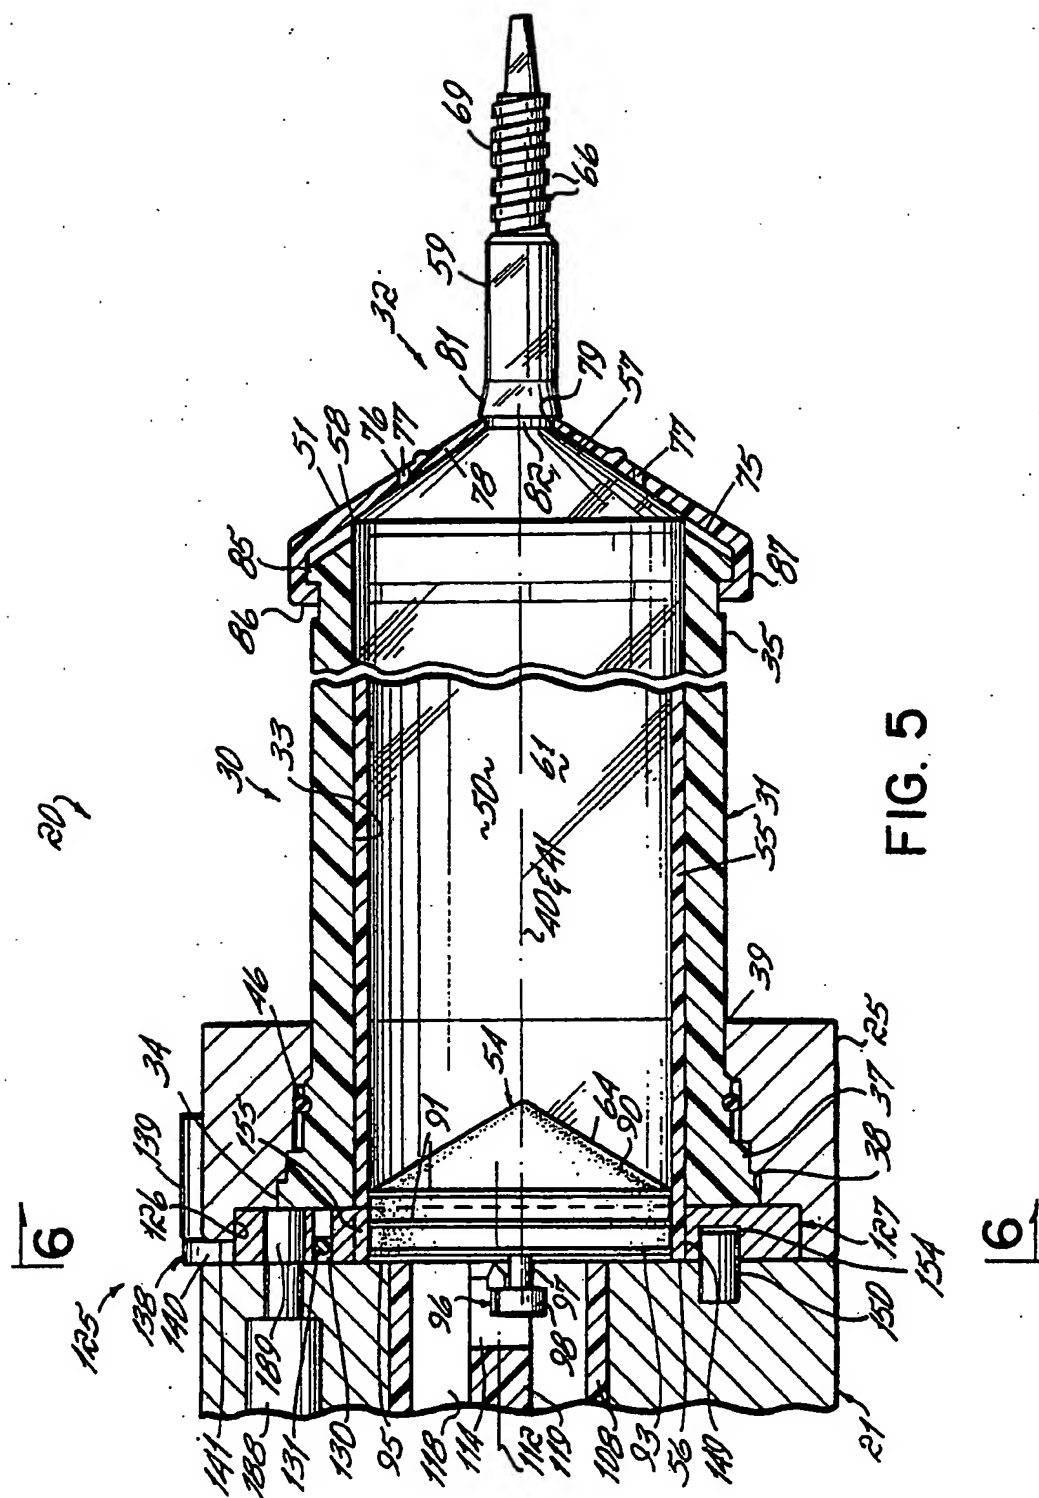


FIG. 4



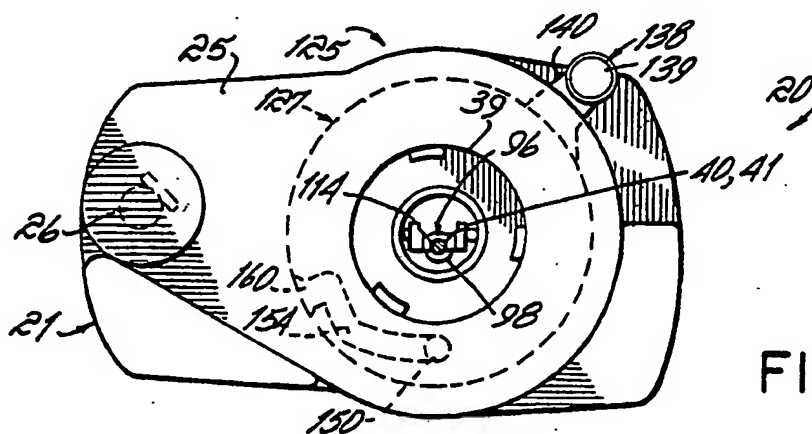


FIG. 7

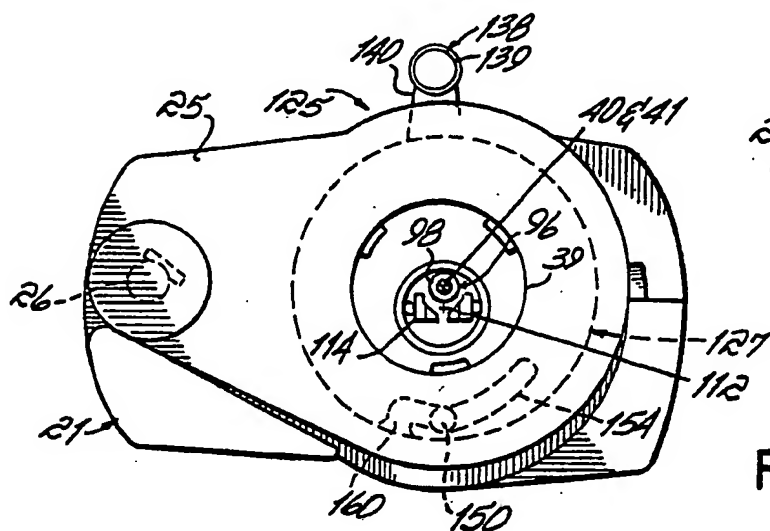


FIG. 8

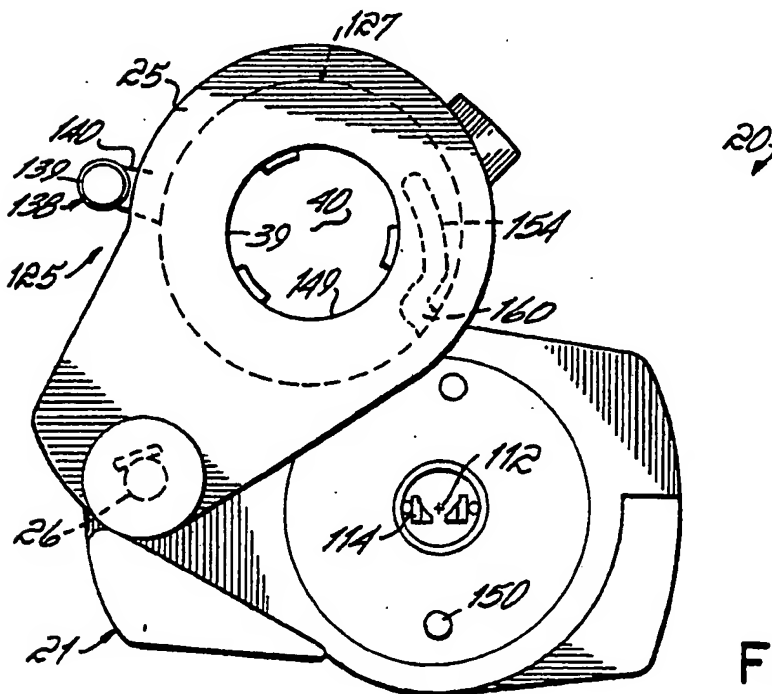


FIG. 9

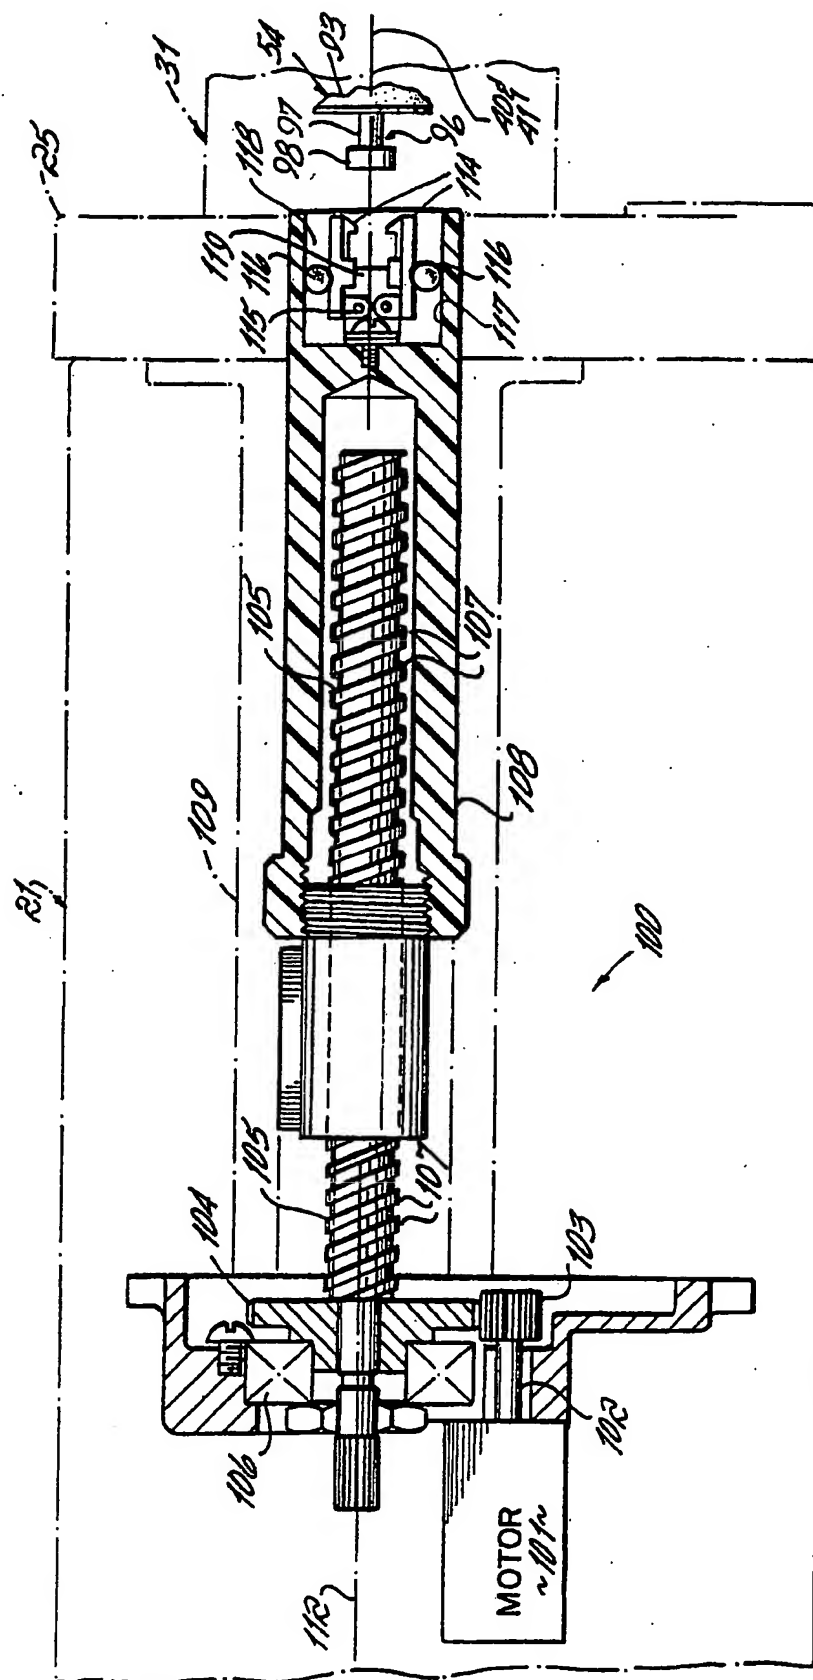


FIG. 10

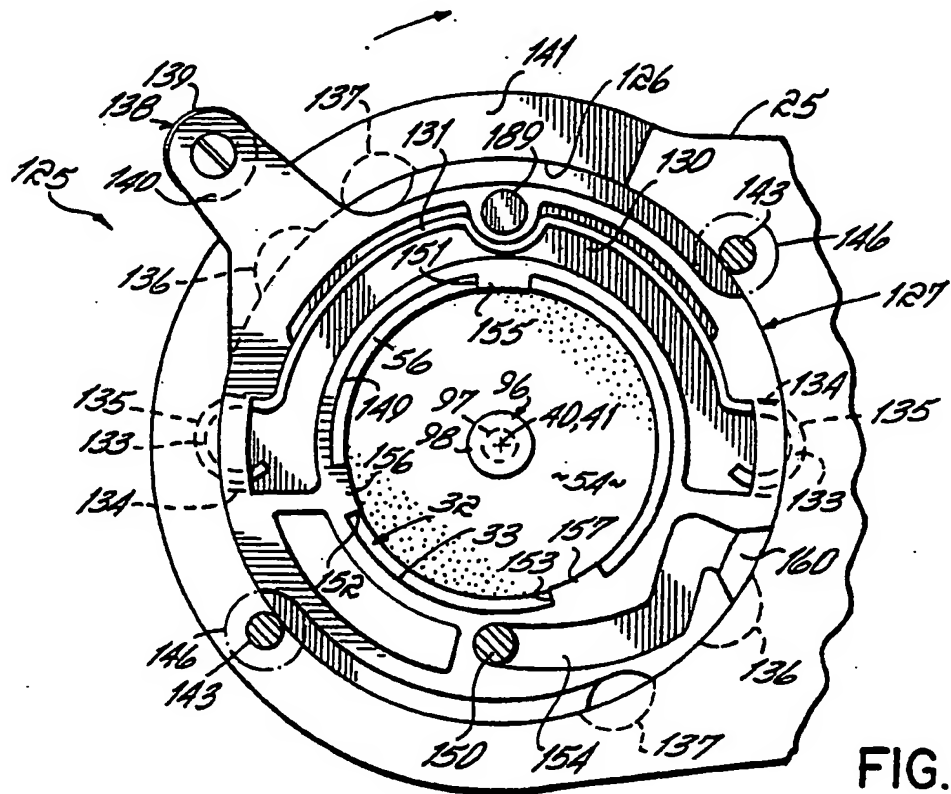


FIG. 6

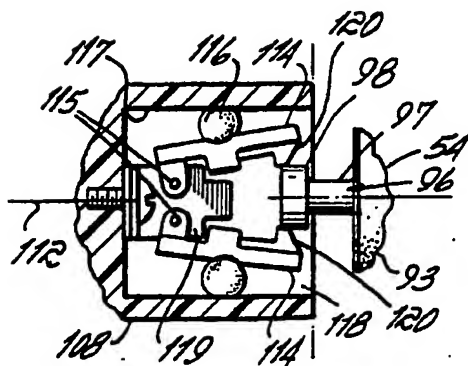


FIG. 11

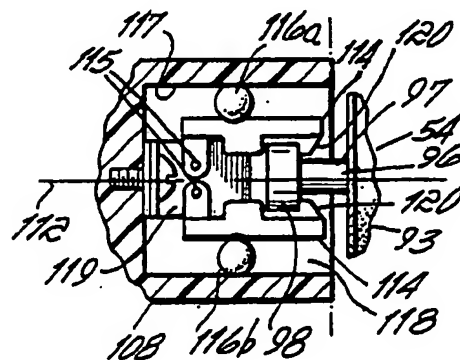


FIG. 12

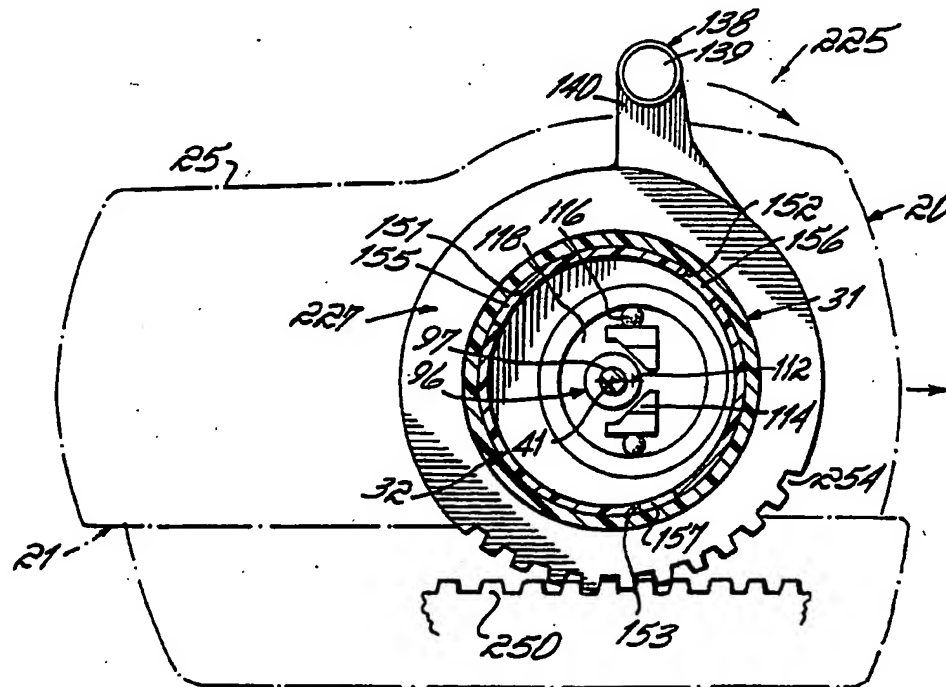


FIG. 13

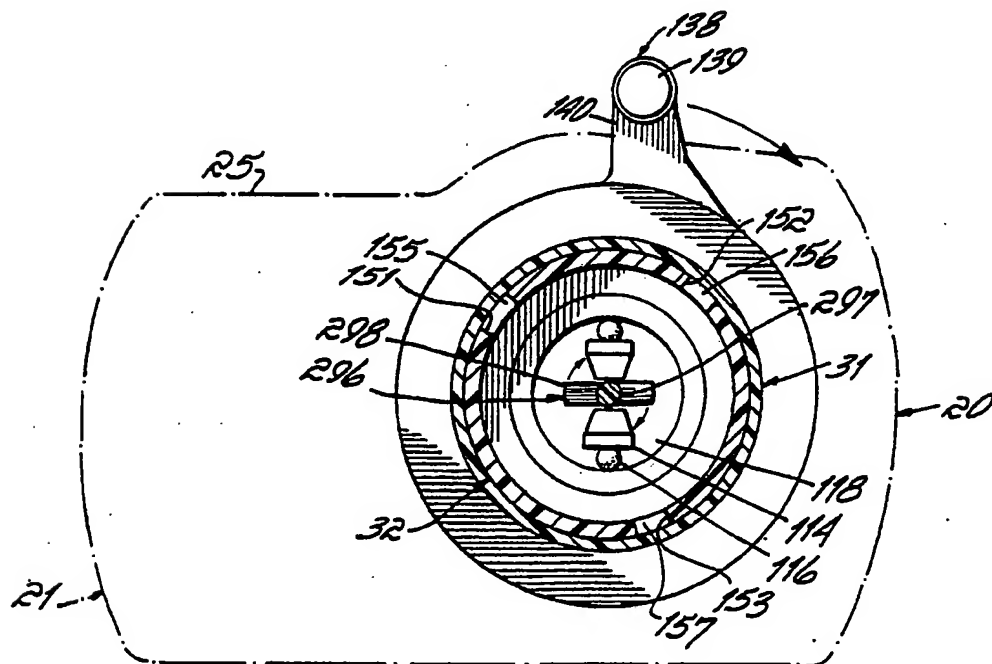


FIG. 14

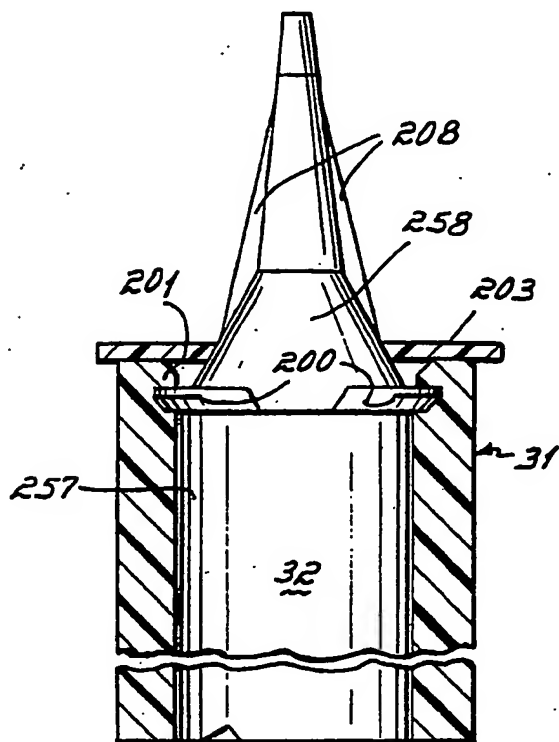


FIG. 15

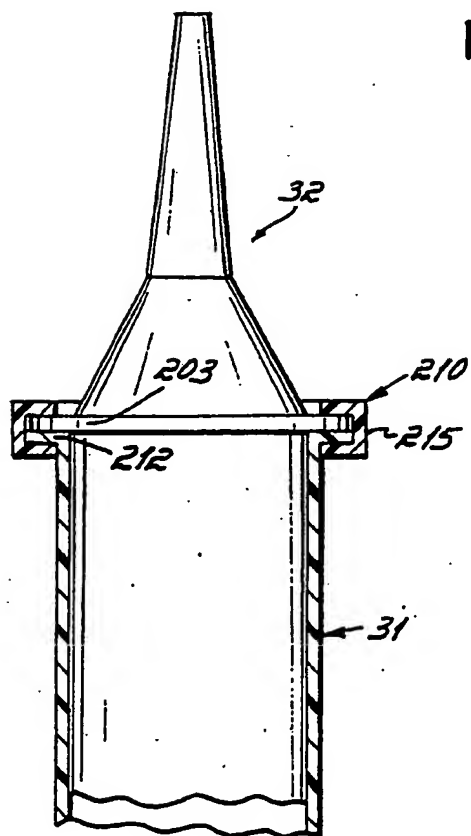


FIG. 16

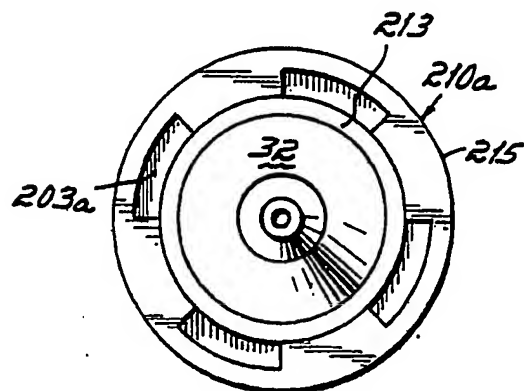


FIG. 17

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 92/00385

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 A61M5/145																				
II. FIELDS SEARCHED <div style="text-align: center; margin-top: 10px;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none;">Int.Cl. 5</td> <td style="border: none;">A61M ; A61F ; B05C</td> </tr> </table> <div style="text-align: center; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched⁸</div>			Classification System	Classification Symbols	Int.Cl. 5	A61M ; A61F ; B05C														
Classification System	Classification Symbols																			
Int.Cl. 5	A61M ; A61F ; B05C																			
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table style="width: 100%; border: none;"> <tr> <td style="width: 10%; border: none;">Category¹⁰</td> <td style="width: 70%; border: none;">Citation of Document,¹¹ with indication, where appropriate, of the relevant passages¹²</td> <td style="width: 20%; border: none;">Relevant to Claim No.¹³</td> </tr> <tr> <td style="border: none; vertical-align: top;">A</td> <td style="border: none; vertical-align: top;">EP,A,0 143 895 (DISETRONIC) 12 June 1985 see page 6, paragraph 2 - page 8, paragraph 2; figures</td> <td style="border: none; vertical-align: top;">1-90</td> </tr> <tr> <td style="border: none; vertical-align: top;">A</td> <td style="border: none; vertical-align: top;">EP,A,0 362 484 (B BRAUN MELSUNGEN) 11 April 1990 see column 3, line 39 - line 58; figures</td> <td style="border: none; vertical-align: top;">1-90</td> </tr> <tr> <td style="border: none; vertical-align: top;">A</td> <td style="border: none; vertical-align: top;">US,A,4 150 672 (WHITNEY ET AL) 24 April 1979 see column 5, line 4 - column 6, line 42; figures 1-4</td> <td style="border: none; vertical-align: top;">1-90</td> </tr> <tr> <td style="border: none; vertical-align: top;">A</td> <td style="border: none; vertical-align: top;">EP,A,0 346 950 (MEDRAD INC) 20 December 1989 see the whole document</td> <td style="border: none; vertical-align: top;">1-90</td> </tr> <tr> <td style="border: none; vertical-align: top;">A</td> <td style="border: none; vertical-align: top;">US,A,4 695 271 (GOETHEL) 22 September 1987 see the whole document</td> <td style="border: none; vertical-align: top;">1-90</td> </tr> </table>			Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	EP,A,0 143 895 (DISETRONIC) 12 June 1985 see page 6, paragraph 2 - page 8, paragraph 2; figures	1-90	A	EP,A,0 362 484 (B BRAUN MELSUNGEN) 11 April 1990 see column 3, line 39 - line 58; figures	1-90	A	US,A,4 150 672 (WHITNEY ET AL) 24 April 1979 see column 5, line 4 - column 6, line 42; figures 1-4	1-90	A	EP,A,0 346 950 (MEDRAD INC) 20 December 1989 see the whole document	1-90	A	US,A,4 695 271 (GOETHEL) 22 September 1987 see the whole document	1-90
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³																		
A	EP,A,0 143 895 (DISETRONIC) 12 June 1985 see page 6, paragraph 2 - page 8, paragraph 2; figures	1-90																		
A	EP,A,0 362 484 (B BRAUN MELSUNGEN) 11 April 1990 see column 3, line 39 - line 58; figures	1-90																		
A	US,A,4 150 672 (WHITNEY ET AL) 24 April 1979 see column 5, line 4 - column 6, line 42; figures 1-4	1-90																		
A	EP,A,0 346 950 (MEDRAD INC) 20 December 1989 see the whole document	1-90																		
A	US,A,4 695 271 (GOETHEL) 22 September 1987 see the whole document	1-90																		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>																				
IV. CERTIFICATION <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;">Date of the Actual Completion of the International Search</td> <td style="width: 50%; border: none;">Date of Mailing of this International Search Report</td> </tr> <tr> <td style="border: none; text-align: center;">04 JUNE 1992</td> <td style="border: none; text-align: center;">23.06.92</td> </tr> <tr> <td style="border: none;">International Searching Authority</td> <td style="border: none;">Signature of Authorized Officer</td> </tr> <tr> <td style="border: none; text-align: center;">EUROPEAN PATENT OFFICE</td> <td style="border: none;">CLARKSON P. </td> </tr> </table>			Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	04 JUNE 1992	23.06.92	International Searching Authority	Signature of Authorized Officer	EUROPEAN PATENT OFFICE	CLARKSON P.										
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report																			
04 JUNE 1992	23.06.92																			
International Searching Authority	Signature of Authorized Officer																			
EUROPEAN PATENT OFFICE	CLARKSON P.																			

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9200385
SA 56756

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 04/06/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0143895	12-06-85	DE-A- 3468173	04-02-88
		JP-A- 60072562	24-04-85
		US-A- 4585439	29-04-86
EP-A-0362484	11-04-90	DE-A- 3833821	12-04-90
US-A-4150672	24-04-79	US-A- 4273122	16-06-81
		US-A- 4405318	20-09-83
		US-A- 4634431	06-01-87
EP-A-0346950	20-12-89	EP-A, B 0170009	05-02-86
		US-A- 4677980	07-07-87
US-A-4695271	22-09-87	None	

THIS PAGE BLANK (USPTO)